



CVD 9202

CVD 9212

***Composite / S-Video
Distribution
Amplifiers***



C O V I D

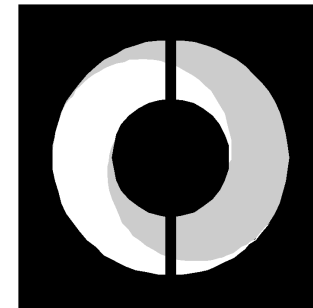

C O V I D

1723 West 4th Street / Tempe, AZ 85281
phone (480) 966-2221 / fax (480) 966-6728
toll free (800) 638-6104
internet: www.covid.com
© 2002 Covid, Inc. All Rights Reserved.

User's Manual

DISCLAIMER

The information contained in this document is subject to change without notice.

Covid, Inc. makes no warranty of any kind with regard to this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be reproduced or distributed in any form or by any means without prior written consent of Covid, Inc.

CVD 9202

1 Input, 2 Output

S-Video

Distribution Amplifier


CVD 9212

1 Input, 2 Output

Composite Video

Distribution Amplifier

**A Simple Solution for Distributing A Single
Video Source to Several Displays**



C O V I D

General Specifications

CVD 9212 1 IN, 2 OUT COMPOSITE VIDEO DISTRIBUTION AMPLIFIER

INPUT:

Signal: Composite Video
Connectors: (1) BNC Female
Video Impedance: 75 Ohms
Video Level: 0.5 – 1.5 Vpp
Sync Polarity: + / -

OUTPUT:

Signal: Composite Video
Connectors: (2) BNC Female
Video Impedance: 75 Ohms
Video Level: Follows Input
Bandwidth: 150 MHz

PHYSICAL SPECIFICATIONS

DIMENSIONS:

1U High
(in) 1.75 H x 6.375 W x 6.00 D
(cm) 4.45 H x 16.19 W x 15.24 D

ENCLOSURE:

Aluminum, Black, Texture Finish

WEIGHT:


Net: 1.0 lb. / 0.45 kg

POWER:

Input: 110 or 120 VAC Wall Mount,
12 VAC, 1A, UL
Dissipated: 2 Watts

Contents

Introduction	2
Panel Descriptions	3
Front Panel	3
Rear Panel	4
Operational Setup	5
Typical Configuration	6
General Specifications	7
CVD 9202	7
CVD 9212	8

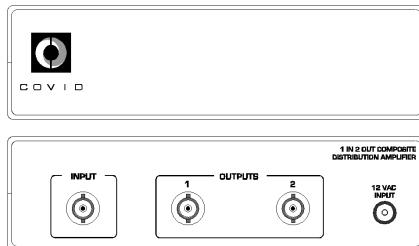

Introduction

Thank you for purchasing a CVD 9202/9212 video distribution amplifier. Covid's CVD 9202/9212 provides a simple solution for distributing a single source to several displays. The CVD 9202/9212 may be used to distribute video signals to multiple displays, or to boost signal strength over long coax runs. Some of the features of the CVD 9202/9212 video distribution amplifiers include:

- BNC Female Connectors on Inputs and Outputs (9212)
- 4-pin mini-DIN Female Connectors on Inputs and Outputs (9202)
- 150 MHz Bandwidth

General Specifications

CVD 9202 1 IN, 2 OUT S-VIDEO DISTRIBUTION AMPLIFIER

INPUT:

Signal:	S-Video
Connectors:	(1) 4-pin mini-DIN Female
Video Impedance:	75 Ohms
Video Level:	0.5 – 1.5 Vpp
Sync Polarity:	+ / -

OUTPUT:

Signal:	S-Video
Connectors:	(2) 4-pin mini-DIN Female
Video Impedance:	75 Ohms
Video Signal Level:	Follows Input
Bandwidth:	150 MHz

PHYSICAL SPECIFICATIONS

DIMENSIONS:

	1U High
(in)	1.75 H x 6.375 W x 6.00 D
(cm)	4.45 H x 16.19 W x 15.24 D

ENCLOSURE:

Aluminum, Black, Texture Finish


WEIGHT:

Net: 1.0 lb. / 0.45 kg


POWER:

Input: 110 or 120 VAC Wall Mount,
12 VAC, 1A, UL


Dissipated: 2 Watts

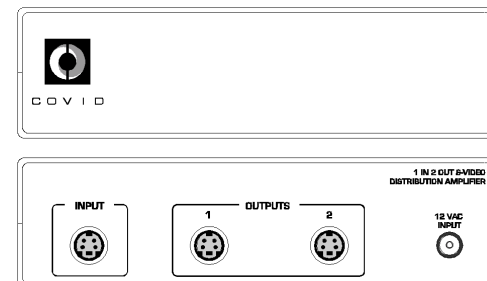

Typical Configuration

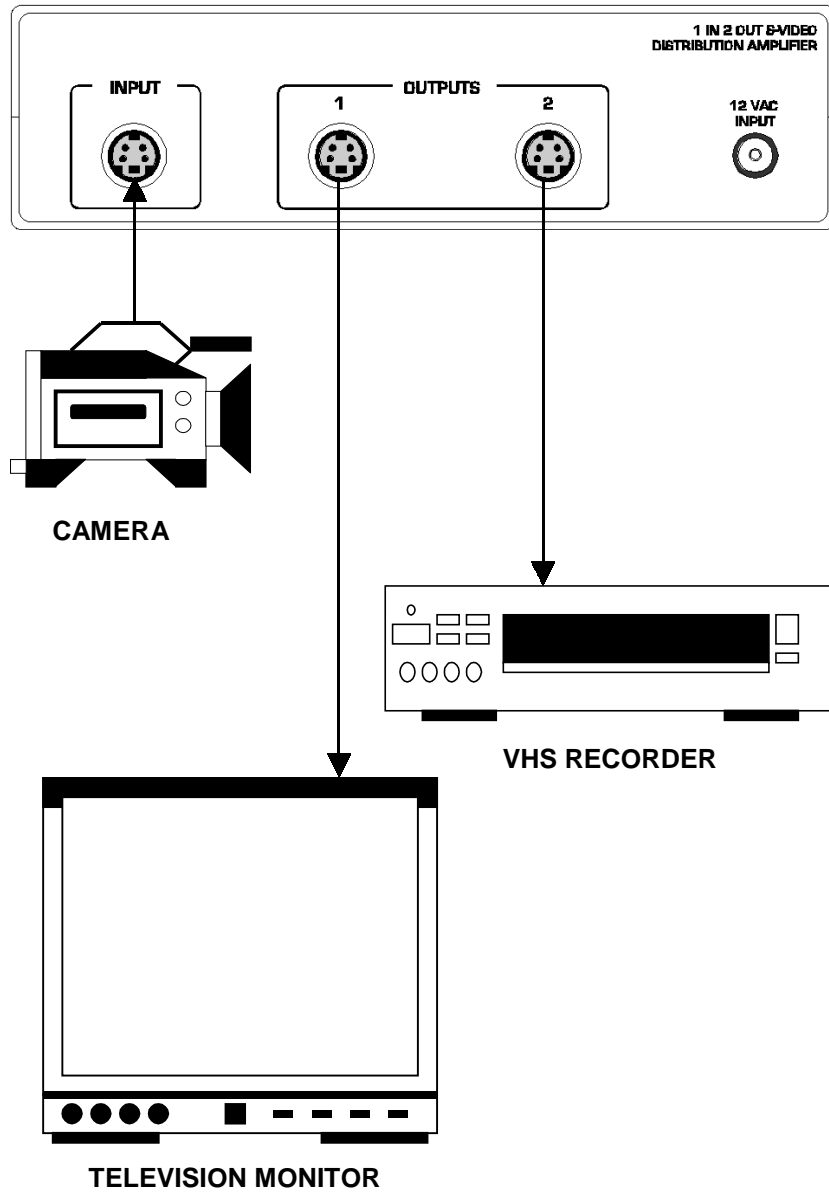


Panel Descriptions

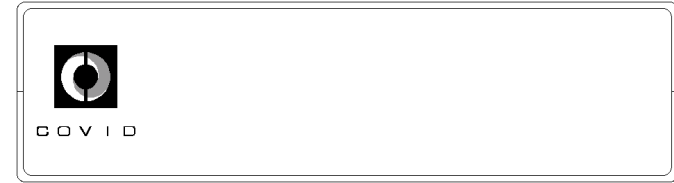

FRONT PANEL LAYOUT

FRONT PANEL


Panel Descriptions

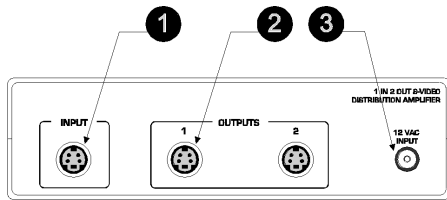

CVD 9202 REAR PANEL LAYOUT

REAR PANEL

1. **AC IN:** Power in accepts 12 VAC from a Wall Mount power cube.
2. **INPUT:** S-Video Connector accepts the input signal.
3. **OUTPUT:** S-Video Connectors are provided to connect to display devices.

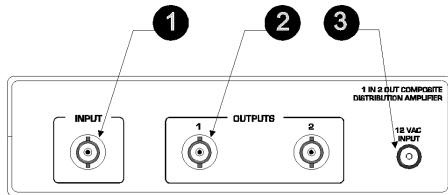

CVD 9212 REAR PANEL LAYOUT

REAR PANEL

1. **AC IN:** Power in accepts 12 VAC from a Wall Mount power cube.
2. **INPUT:** BNC Female Connector accepts the input signal.
3. **OUTPUT:** BNC Female Connectors are provided to connect to display devices.

Operational Setup

Turn off all equipment before connecting or removing cable connections.

1. Connect the video source signal to the input.
2. Connect the video outputs to the displays.
3. Power up the unit.
4. The unit is now operational. Turn on your video source and finally the display monitors.