



APPLICATION & ASSEMBLY INSTRUCTION

NAC3FX-W-TOP | powerCON® TRUE1 TOP

A. APPLICATION INSTRUCTION

Application:


The powerCON TRUE1 system is certified as a connector with breaking capacity according IEC 60320, VDE 0625. It is intended for use as an appliance coupler and interconnection coupler. It serves to supply power to an appliance and from an appliance to other equipment. To be installed by qualified person only.

CONNECTOR ASSIGNMENT:

APPLIANCE INLET

NAC3MPX-TOP
NAC3MPX-WOT-TOP

Power IN




NAC3FX-W-TOP
(Connector)

APPLIANCE OUTLET

NAC3FPX-TOP
NAC3FPX-WOT-TOP
NAC3FPX-ST-TOP

Power OUT




NAC3MX-W-TOP
(Plug connector)


APPLIANCE INLET / OUTLET ► Combination

NAC3PX-TOP

Power IN



Power OUT



NAC3MX-W-TOP
(Plug connector)

powerCON TRUE1 TOP line is full backward compatible with the preceding powerCON TRUE1 products.

Approval based:

VDE

EN 60320-1/EN60320-2-2



UL

UL 498 / CSA C22.2 No. 182.3



Rating:

250 V ac / 16 A

Cable Type:

H05VV-F3G 1.0 mm², Length max. 2 m

H05VV-F3G 1.5 - 2.5 mm²

H07RN-F3G 1.5 mm²

250 V ac / 20 A

SJTOW, SJOOW 3 x 12 AWG

Strain Relief:

White chuck

White chuck

Cable O.D.:

6.0 - 12.0 mm

6.0 - 12.0 mm


UL50E environmental rating

Enclosure Type 4 when mated with attachment plug NAC3MX-W-TOP or mated with appliance inlet NAC3MPX*-TOP with sealing cover SCNAC-MPX and NAC3PX-TOP with sealing cover SCNAC-PX.


B. ASSEMBLY INSTRUCTION

- Ⓐ Insert cable into the bushing and housing.


Note: "Apply cable pulling lubricant to cable jacket."

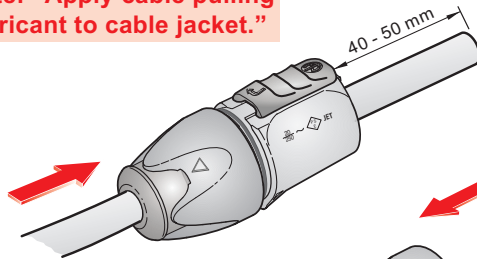


- Ⓑ Separate the housing from the bushing (cable remain in bushing)

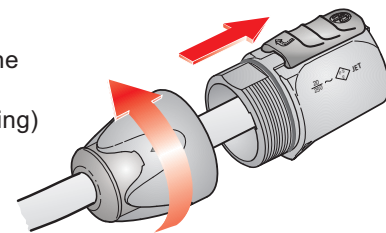

- Ⓒ Place chuck over the cable.

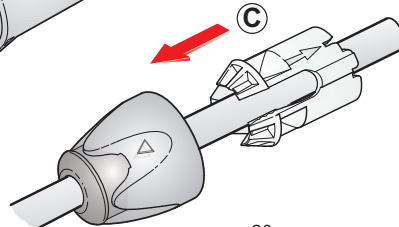


- Ⓓ Prepare cable as shown.

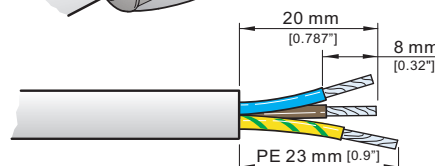

VDE (EN 60320-1/EN60320-2-2)


- Ⓘ Recommendation:
Wire Pulling Lubricant - LUB-I/0.95 from 3M™

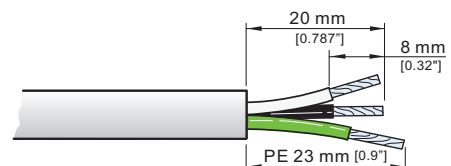

UL (UL 498 / CSA C22.2 No. 182.3)




E

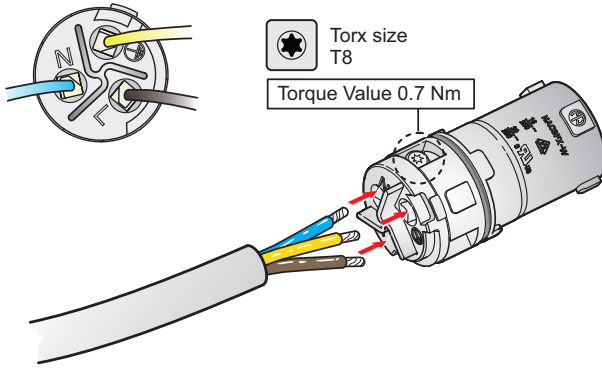


Slide the cable into the contacts and clamp with the screw with Torx size T8.

Wiring	VDE	UL
L ⇒	brown	black
N ⇒	blue	white
PE ⇒	green/yellow	green

F

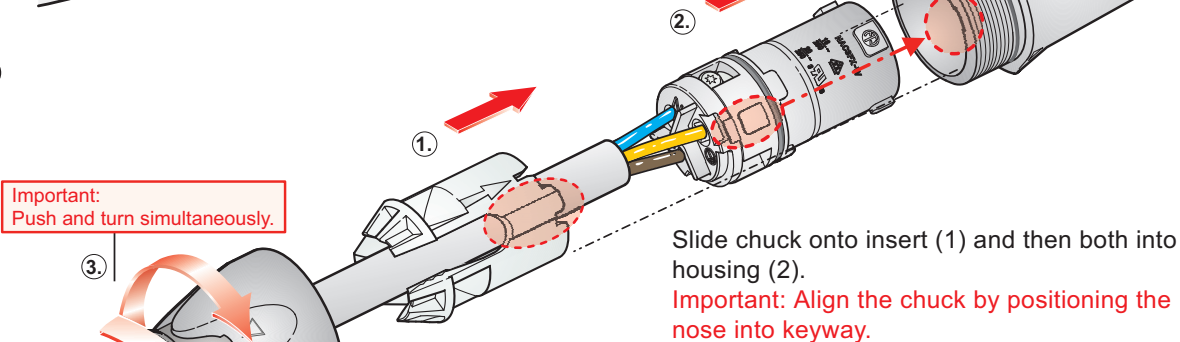


G

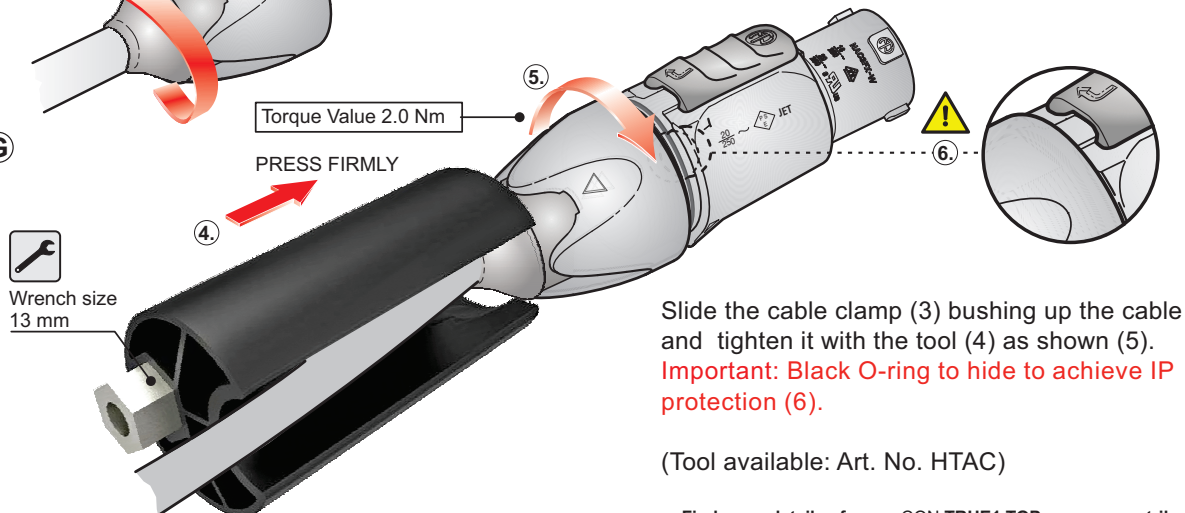

Find more details of powerCON TRUE1 TOP on www.neutrik.com.

FOR DISASSEMBLY - OPEN TWIST LOCK!

1. Press with screw driver to unlock
2. Turn bushing 360°.
3. Repeat step 1+2 until bushing is unscrewed.

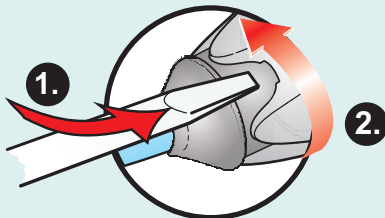

CAUTION

To ensure protection category, do not expose the connection to bending forces (e.g. do not attach loads to the cable, no free-dangling cable windings etc.).



SAFETY WARNING

For safety and certification reasons the connector must be replaced in case of any broken parts or excessive wear and tear.

Neutrik AG
Neutrik USA Inc.
Neutrik (UK) Ltd.
Neutrik Vertriebs GmbH

LI
USA
UK
DE/NL/AT/DK

T: +423 / 237 24 24
T: +1 704 / 972 3050
T: +44 1983 / 811 441
T: +49 8131 / 280 890
F: +423 / 232 53 93
F: +1 704 / 438 9202
F: +44 1983 / 811 439
F: +49 8131 / 280 830

Neutrik France
Neutrik Tokyo Ltd.
Neutrik Hong Kong Ltd.
Neutrik India Pvt. Ltd.

FR
JP
HK
IND

T: +33 1 / 4131 6750
T: +81 3 / 3663 4733
T: +852 / 2687 6055
T: +91 / 982 05 43 424

F: +33 1 / 4131 0511
F: +81 3 / 3663 4796
F: +852 / 2687 6052
F: +91 / 22 26163 540