

# TECHNICAL SPECIFICATION




Typically according to the HDMI specifications the 5V output on the HDMI connector should provide at least 50mA of current to the connected device (sink). However some source devices do not provide enough current (or the 5V output drops as the sink draws power from it). Port powered devices such as some HDMI video switches, splitters, or cable boosters/equalizers rely on the 5V from the source to provide enough current. If cable installers have a source that does not provide enough power on its HDMI output for these types of devices, this power adapter can substitute 5V from the external power supply to the downstream device.

## Technical Information

Parameters	Product Specifications
Power Supply	DC 5V from USB connector
HDMI Connector	HDMI-A female to HDMI-A male
Cable Diameter	3.00mm
Cable Jacket	PVC
Flammability	VW1
Cable Length	20cm (7.87in.)



## Dimensions

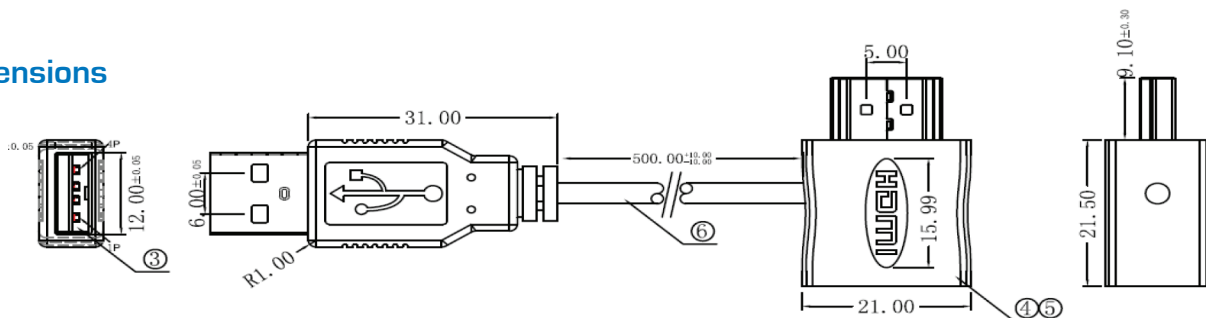

Part Number:	HD-PI
Revision Number:	1
Date:	6-23-2016
Page Number:	1 of 1

## USB to HDMI Power Injector

1723 W. 4th Street Tempe Arizona 85281

P: 800.638.6104 | F: 480.966.6728 | E: sales@covid.com www.covid.com