

TECHNICAL SPECIFICATION



HD28-XXRM

Description: Active HDMI Cable with Ethernet, 28 AWG Construction, Distances up to 75 Feet, Non-Plenum

Why This Cable?

This active 28 AWG cable has built-in circuitry allowing for longer cable runs. Because of the smaller gauge size, this HDMI cable offers easier installation in tight, hard to reach spaces.



Technical Specification

Maximum Video Settings:25' & 35' = 2160P@30Hz (4K -10G) | 50' & 75' = 1080P@60Hz (8 bit)

Connectors:HDMI, 19Pin, Male, T-Grip, Overall AU Plating

Connector Hood:Over-Mold, Blue

Cable Jacket:PVC, Black

Cable Conductors:28 AWG*5P (STP)+4C

Overall Shield:Copper Foil with Adhesive Backing

Outer Diameter:0.30"

Minimum Bend Radius:3"

Maximum Tensile:15 kgf


Operating/Storage Temperature:-10°C ~ +75°C

Operating Humidity:50% ~ 75%

Number of Connector Mating Cycles:3000

Compliances:RoHS, Type CMR

Available Lengths:25ft., 35ft., 50ft. & 75ft.

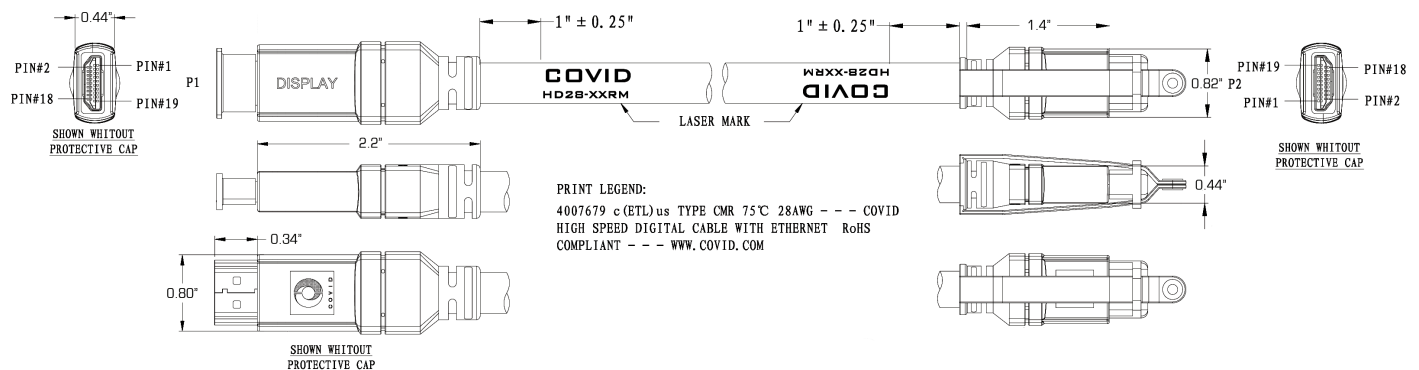

Active HDMI Cable - Ethernet - 28 AWG
Non-Plenum

Part Number:	HD28-XXRM
Revision Number:	1
Date:	12-1-2017
Page Number:	1 of 1

1723 W. 4th Street Tempe Arizona 85281

P: 800.638.6104 | F: 480.966.6728 | E: sales@covid.com | www.covid.com