


CVD1240

(2) Stranded Coax, 26 AWG

Description S-Video Coax Cable - (2) 26 AWG Coax - Stranded Conductors - Non-Plenum

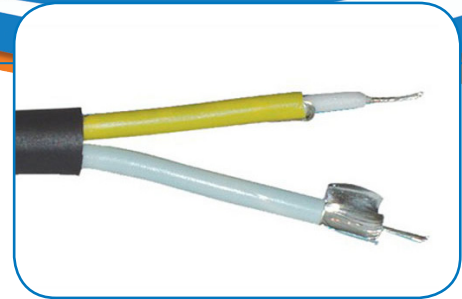

Technical Specifications

Element 1

Coaxes: 26 AWG (7/34), Tinned Copper, Stranded
 Dielectric: Foamed Polyethylene, 0.073" \pm 0.002" Diameter
 Outer Shield: Aluminum (In) / Polyester Tape, 25% Overlap
 Inner Shield: 36 AWG Tinned Copper, 95% min. Coverage
 Jacket: Polyvinyl Chloride, 0.010" Wall Thickness, 0.104" \pm 0.005" Final Diameter

Construction

Number of Coaxes: 2
 Color Code: 1. White 2. Yellow
 Outer Jacket: Polyvinyl Chloride, 0.024" Nominal Wall
 Final Diameter: 0.245" \pm 0.005"
 Color: Black

Approximate Weight:

37 lbs. per 1000 ft.

Electrical Characteristics

Impedance: 75 Ohms Nominal
 Capacitance: 18.0 pF / ft. Nominal
 Time Delay: 1.30 ns / ft. Nominal
 Velocity of Propagation: 81%

Conductor Specifications

Nominal Attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.656
100	-5.362
200	-7.675

UL Listing

Type CL2 as Specified in Article 725 of the National Electric Code