


# CVD 9108

## COMPOSITE VIDEO DISTRIBUTION AMPLIFIER

1 In, 8 Out (Metal Enclosure)

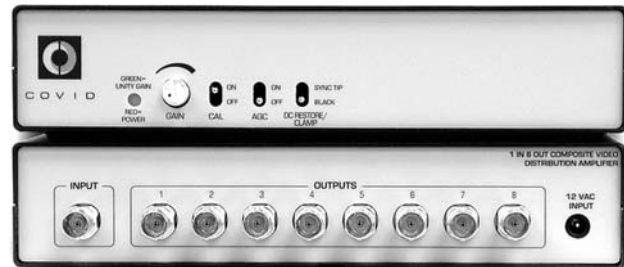

### Technical Specifications

#### INPUT OVERVIEW

Signal . . . . .	Composite Video
Connector . . . . .	(1) BNC Female
Video Impedance . . . . .	75 Ohms
Video Level . . . . .	0.5 Vpp - 1.5 Vpp
Coupling . . . . .	AC

#### OUTPUT OVERVIEW

Signal . . . . .	Composite Video
Connectors . . . . .	(8) BNC Female
Video Impedance . . . . .	75 Ohms
Video Level . . . . .	0.5 Vpp - 1.5 Vpp
Gain Range . . . . .	-6 dB to +6 dB
Coupling . . . . .	DC
Bandwidth . . . . .	150 MHz
Differential Gain . . . . .	< 0.1%
Differential Phase . . . . .	< 0.5 Degrees

#### CONTROL

- Gain Control Knob
- Calibration Select Switch
- AGC Gain Select Switch
- Sync Clamp Select Switch

#### DISPLAYS

- Power On / Unity Gain Indicator

### Physical Specifications

Dimensions . . . . .	1U High, 1/2 Rack Wide
(inches) . . . . .	1.75 H x 8.50 W x 6.00 D
(cm) . . . . .	4.45 H x 21.59 W x 15.24 D
Enclosure . . . . .	Aluminum, Black, Texture Finish
Weight . . . . .	1.6 lbs / 0.73 kg
Input Voltage . . . . .	110 or 220 VAC Wall Mount, 12 VAC, 1A, UL
Power Dissipated . . . . .	8 Watts

### Accessories

CVD 0003 . . . . .	Power Supply (included)
--------------------	-------------------------

### Other Available Options

**CVA 9108** - 1 In, 8 Out Composite Video with Stereo Audio Distribution Amplifier.