


# COM 2400

**22 AWG INDIVIDUALLY SHIELDED TWISTED PAIR WITH  
(2) 18 AWG CONDUCTORS & (1) CAT5E CABLE**

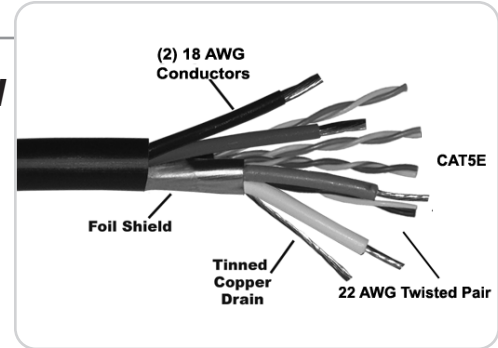

## TECHNICAL SPECIFICATIONS

### ELEMENT 1

Conductors . . . . .	18 AWG (16/30) Bare Copper, Stranded
Insulation . . . . .	Polyvinyl Chloride,
Final Diameter . . . . .	0.065"
Number of Conductors . . . . .	2
Color Code . . . . .	1. Red                      2. Black

### ELEMENT 2

Twisted Pairs . . . . .	22 AWG (7/30) Bare Copper, Stranded Individually Shielded Twisted Pair
Shield . . . . .	Aluminum (In) / Polyester Tape, 20% Overlap
Drain Wire . . . . .	24 AWG (7/32) Tinned Copper
Insulation . . . . .	Foam F.E.P.
Final Diameter . . . . .	0.102"
Number of Pairs . . . . .	1
Color Code . . . . .	White & Blue

### ELEMENT 3

Conductors . . . . .	24 AWG Bare Copper, Solid
Insulation . . . . .	Polyolefin
Color Code . . . . .	1. White/Blue & Blue, 2. White/Orange & Orange 3. White/Green & Green, 4. White/Brown & Brown
Jacket Material . . . . .	PVC
Jacket Thickness . . . . .	0.190" Nominal
Rip Cord . . . . .	Nylon

### CONSTRUCTION

Conductors . . . . .	Elements 1, 2 and 3
Jacket . . . . .	Polyvinyl Chloride
Final Diameter . . . . .	0.530"
Color . . . . .	Black/Red Stripe

### UL LISTING

Type CM as Specified in Article 800 of the National Electrical Code