


COM 2400-QM

22 AWG INDIVIDUALLY SHIELDED TWISTED PAIR WITH (2) 18 AWG CONDUCTORS & (1) CAT5E LOW SKEW CABLE

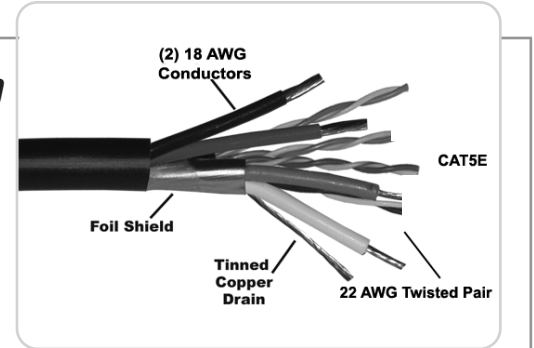

TECHNICAL SPECIFICATIONS

ELEMENT 1

Conductors	18 AWG (16/30) Bare Copper, Stranded
Insulation	Polyvinyl Chloride,
Final Diameter	0.065"
Number of Conductors	2
Color Code	1. Red 2. Black

ELEMENT 2

Twisted Pairs	22 AWG (7/30) Bare Copper, Stranded Individually Shielded Twisted Pair
Shield	Aluminum (In) / Polyester Tape, 20% Overlap
Drain Wire	Stranded Tinned Copper
Insulation	Foam Polyolefin
Final Diameter	0.102"
Number of Pairs	1
Color Code	White & Blue

ELEMENT 3

Conductors	24 AWG Bare Copper, Solid
Insulation	Polyethylene
Color Code	1. White/Blue & Blue, 2. White/Orange & Orange 3. White/Green & Green, 4. White/Brown & Brown
Jacket Thickness	0.190" Nominal
Rip Cord	Nylon
Skew Rating	15ns/100m

CONSTRUCTION

Conductors	Elements 1, 2 and 3
Jacket	Polyvinyl Chloride
Final Diameter	0.491"
Color	Black/Yellow Stripe

UL LISTING

Type CM as Specified in Article 800 of the National Electrical Code