


# COM 3400

**PLENUM 22 AWG INDIVIDUALLY SHIELDED TWISTED PAIR WITH (2) 18 AWG CONDUCTORS**

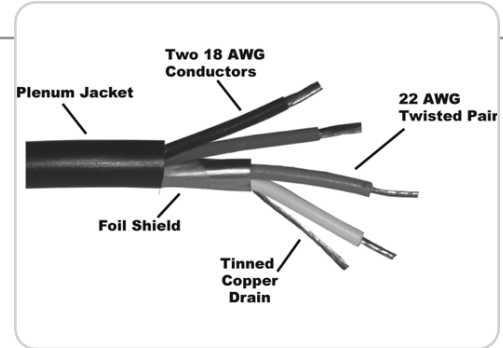

## TECHNICAL SPECIFICATIONS

### ELEMENT 1

Conductors . . . . . 18 AWG (16/30) Bare Copper, Stranded  
Insulation . . . . . Polyvinyl Chloride,  
Final Diameter . . . . . 0.065"  
Number of Conductors . . . . . 2  
Color Code . . . . . 1. Red                      2. Black

### ELEMENT 2

Twisted Pairs . . . . . 22 AWG (7/30) Bare Copper, Stranded Individually Shielded Twisted Pair  
Shield . . . . . Aluminum (In) / Polyester Tape, 20% Overlap  
Drain Wire . . . . . 24 AWG (7/32) Tinned Copper  
Insulation . . . . . Foam F.E.P.  
Final Diameter . . . . . 0.102"  
Number of Pairs . . . . . 1  
Color Code . . . . . White & Blue

### CONSTRUCTION

Conductors . . . . . Elements 1 & 2  
Jacket . . . . . Polyvinyl Chloride  
Final Diameter . . . . . 0.216"  
Color . . . . . Dark Blue

### UL LISTING

Type CMP as Specified in Article 800 of the National Electrical Code