


# COM 4400-QMP

**PLENUM 22 AWG INDIVIDUALLY SHIELDED TWISTED PAIR WITH (2) 18 AWG CONDUCTORS & (1) CAT5E LOW SKEW CABLE**

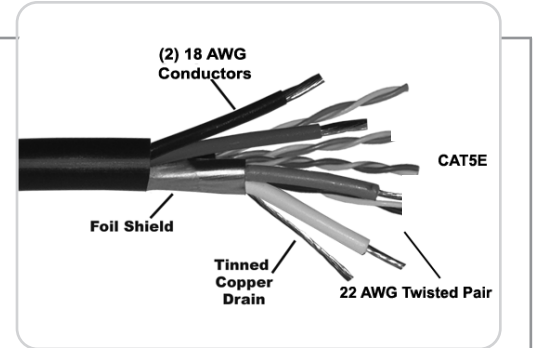

## TECHNICAL SPECIFICATIONS

### ELEMENT 1

Conductors . . . . .	18 AWG (16/30) Bare Copper, Stranded
Insulation . . . . .	Remguard
Final Diameter . . . . .	0.065"
Number of Conductors . . . . .	2
Color Code . . . . .	1. Red                      2. Black

### ELEMENT 2

Twisted Pairs . . . . .	22 AWG (7/30) Bare Copper, Stranded Individually Shielded Twisted Pair
Shield . . . . .	Aluminum (In) / Polyester Tape, 20% Overlap
Drain Wire . . . . .	24 AWG (7/32) Tinned Copper
Insulation . . . . .	Foamed Fluorinated Ethylene Propylene
Final Diameter . . . . .	0.102"
Number of Pairs . . . . .	1
Color Code . . . . .	White & Blue

### ELEMENT 3

Conductors . . . . .	24 AWG Bare Copper, Solid
Insulation . . . . .	Fluorinated Ethylene Propylene
Color Code . . . . .	1. White/Blue & Blue, 2. White/Orange & Orange 3. White/Green & Green, 4. White/Brown & Brown
Jacket Thickness . . . . .	0.190" Nominal
Rip Cord . . . . .	Nylon
Skew Rating . . . . .	15ns/100m

### CONSTRUCTION

Conductors . . . . .	Elements 1, 2 and 3
Jacket . . . . .	Remguard Plenum Polymer
Final Diameter . . . . .	0.463"
Color . . . . .	Black/Yellow Stripe

### UL LISTING

Type CMP as Specified in Article 800 of the National Electrical Code