


CSP 1400 22

(2) 22-AWG INDIVIDUALLY SHIELDED TWISTED PAIRS

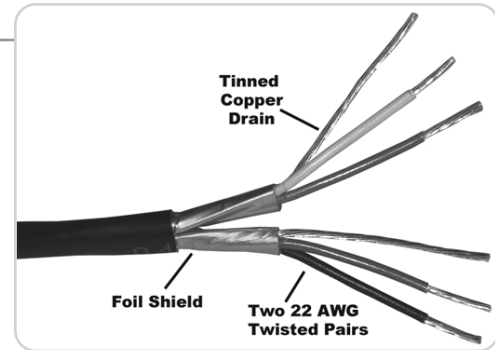

TECHNICAL SPECIFICATIONS

PRIMARY

Twisted Pairs	22 AWG (7/30) Tinned Copper, Stranded, Individually Shielded Twisted Pairs
Insulation	Polyvinyl Chloride
Shield	Aluminum (In) / Polyester Tape, 25% Overlap
Drain Wire	22 AWG (7/30) Stranded, Tinned Copper

CONSTRUCTION

Number of Pairs	2
Color Code	1. Black & Red, 2. Green & White
Jacket	Polyvinyl Chloride, 0.030" Nominal Wall Thickness
Final Diameter	0.170"
Color	Black

ELECTRICAL CHARACTERISTICS

Capacitance	34.0 pF / ft. Nominal
Resistance	16.0 Ohms / 1000 ft.

UL LISTING

Type CL2 as Specified in Article 725 of the National Electric Code.