


# CSP 3200 18

**PLENUM 18AWG INDIVIDUALLY SHIELDED  
TWISTED PAIR**

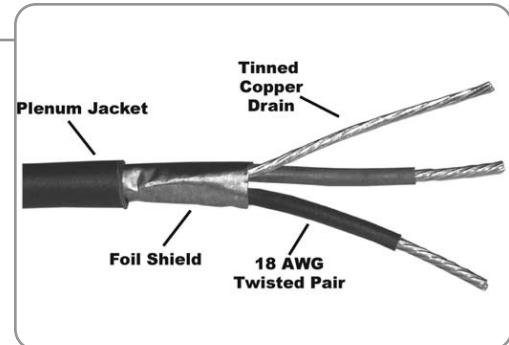

## TECHNICAL SPECIFICATIONS

### PRIMARY

Twisted Pairs . . . . . 18 AWG (7/26) Tinned Copper, Stranded, Individually Shielded Twisted Pair  
Insulation . . . . . Polyvinyl Chloride

### CONSTRUCTION

Number of Pairs . . . . . 1  
Color Code . . . . . Black & Red  
Shield . . . . . Aluminum (In) / Polyester Tape, 25% Overlap  
Drain Wire . . . . . 18 AWG (7/30) Tinned Copper  
Jacket . . . . . Polyvinyl Chloride, 0.015" Wall Thickness  
Final Diameter . . . . . 0.161"  
Color . . . . . Dark Blue

### UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.