


## CSP 3200 22

### PLENUM 22AWG INDIVIDUALLY SHIELDED TWISTED PAIR

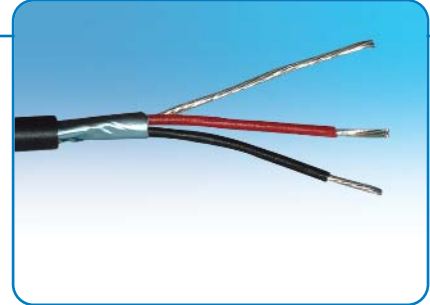

#### TECHNICAL SPECIFICATIONS

##### PRIMARY

**Twisted Pairs** . . . . . **22 AWG (7/30) Tinned Copper, Stranded, Individually Shielded Twisted Pair**  
**Insulation** . . . . . **Polyvinyl Chloride**

##### CONSTRUCTION

**Number of Pairs** . . . . . **1**  
**Color Code** . . . . . **Black & Red**  
**Shield** . . . . . **Aluminum (In) / Polyester Tape, 25% Overlap**  
**Drain Wire** . . . . . **22 AWG (7/30) Tinned Copper**  
**Jacket** . . . . . **Polyvinyl Chloride, 0.015" Wall Thickness**  
**Final Diameter** . . . . . **0.126"**  
**Color** . . . . . **Dark Blue**

##### ELECTRICAL CHARACTERISTICS

**Capacitance** . . . . . **34.0 pF / ft. Nominal**  
**Resistance** . . . . . **16.0 Ohms / 1000 ft.**

##### UL LISTING

Type **CMP** as Specified in Article 800 of the National Electric Code.



Scan QR code with your smart phone to view online specs