


CAT 0800 5EDW

CAT 5E DIRECT BURIAL/WATER BLOCKED CABLE

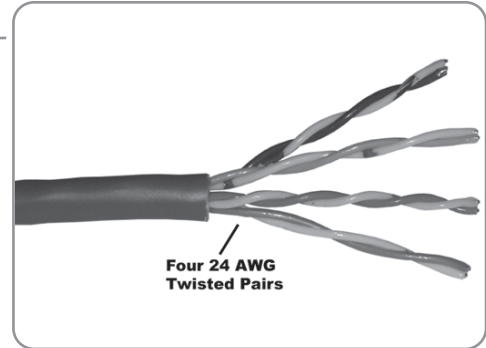

TECHNICAL SPECIFICATIONS

PRIMARY

Pairs 24 AWG Solid Copper
Dielectric Natural Foamed Polyolefin

CONSTRUCTION

Number of Pairs 4
Colors
1. Green & White/Green
2. Blue & White/Blue
3. Orange & White/Orange
4. Brown & White/Brown
Outer Jacket Polyethylene w/Water Block Tape,
Final Diameter 0.2" ± 0.010"
Color Black

ELECTRICAL CHARACTERISTICS

Impedance 100 Ohms ± 15
Capacitance 14 pF / ft.
Velocity of Propagation 70%
Center Cond. DC Resistance 28.6 Ohms / 1000 ft

UL LISTING

Type CMR as specified in Article 800 of The National Electric Code.