


CAT 3800 LS

PLENUM CAT 5E LOW SKEW CABLE

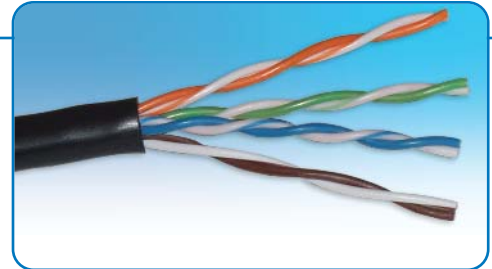

TECHNICAL SPECIFICATIONS

PRIMARY

| | |
|----------------------|---------------------------------------|
| Pairs | 23 AWG Solid Copper |
| Dielectric | Foamed Fluorinated Ethylene Propylene |

CONSTRUCTION

| | |
|---------------------------|--|
| Number of Pairs | 4 |
| Colors | 1. Green & White/Green 2. Blue & White/Blue 3. Orange & White/Orange 4. Brown & White/Brown |
| Outer Jacket | PVC Alloy, 0.015" Wall Thickness |
| Final Diameter | 0.180" ± 0.010" |
| Color | Dark Blue |

ELECTRICAL CHARACTERISTICS

| | |
|--------------------------------------|--------------------|
| Impedance | 100 Ohms ± 15 |
| Capacitance | 14 pF / ft. |
| Velocity of Propagation | 71% |
| Center Cond. DC Resistance | 21 Ohms / 1000 ft. |

UL LISTING

Type CL2P as specified in Article 725 of The National Electric Code.



Scan QR code with your smart phone to view online specs