


# R6+2-18

## RG6 CABLE WITH (2) 18AWG CONDUCTORS

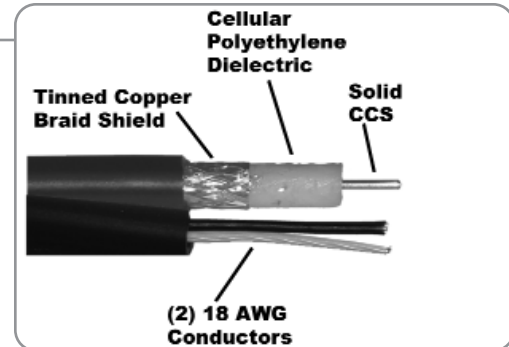

### TECHNICAL SPECIFICATIONS

#### ELEMENT 1

Conductor . . . . . 20 AWG RG-59 Solid Copper  
Dielectric . . . . . Foam Polyethylene, 0.142" Diameter  
Shield . . . . . 36 AWG Tinned Copper Braid, 95% min. Coverage

#### ELEMENT 2

Conductors . . . . . (2) 18 AWG (16/30) Stranded Copper  
Insulation . . . . . Remguard

#### CONSTRUCTION

Number of Coaxes . . . . . Elements 1 & 2 (Siamese Style)  
Outer Jacket . . . . . Polyvinyl Chloride  
Color . . . . . Black

#### ELECTRICAL CHARACTERISTICS

Impedance . . . . . 75 Ohms Nominal  
Capacitance . . . . . 16 pF / ft. Nominal  
Velocity of Propagation . . . . . 82% Nominal

#### UL LISTING

Type CL2 as Specified in Article 725 of the National Electric Code.