


CVD 3900 13

**PLENUM (7) 26AWG COAX,
(2) 22AWG SHIELDED TWISTED PAIRS**

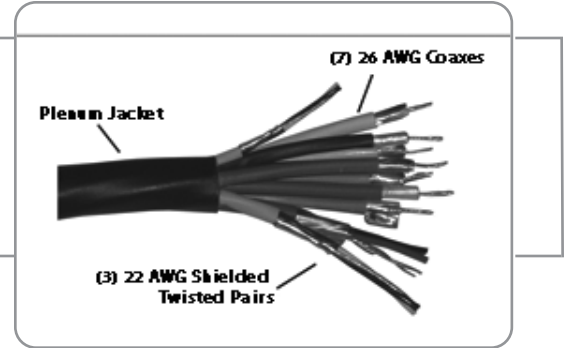

TECHNICAL SPECIFICATIONS

ELEMENT 1

Coaxes	26 AWG (7/34), Tinned Copper, Stranded Natural Foamed Fluorinated Ethylene Propylene,
Dielectric	0.072" Diameter
Outer Shield	Aluminum (In) / Polyester Tape, 25% Overlap
Inner Shield	38 AWG Tinned Copper, 95% Coverage
Jacket	Polyvinyl Chloride, 0.009" Wall Thickness
Final Diameter.	0.102"
Number of Coaxes	7
Color Code	1. Red, 2. Green, 3. Blue, 4. Black, 5. White, 6. Yellow, 7. Orange

ELEMENT 2

Twisted Pairs	22 AWG (7/30) Tinned Copper, Stranded Individually Shielded Twisted Pairs
Shield	Aluminum (In) / Polyester Tape, 25% Overlap
Drain Wire	22 AWG (7/30) Tinned Copper
Jacket	Polyvinyl Chloride .007" Wall Thickness
Final Diameter.	0.105"
Number of Pairs	3
Color Code	1. Red & Black 2. Black & Yellow 3. White & Black

CONSTRUCTION

Conductors.	Elements 1, 2
Jacket	Polyvinyl Chloride
Final Diameter.	0.435"
Color.	Dark Blue

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.60
100	-5.10
200	-7.40
400	-11.0
750	-15.9
1000	-17.0

UL LISTING

Type CL2P as Specified in Article 725 of the National Electric Code