


CVD 0600

RGBHV 6 COAX CABLE

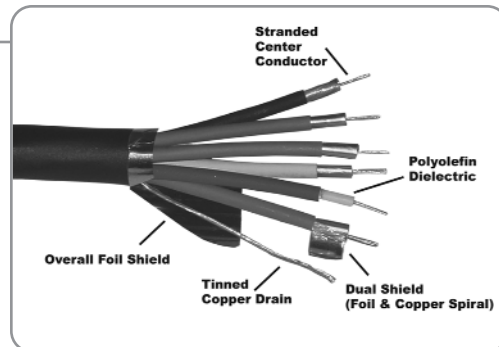

TECHNICAL SPECIFICATIONS

PRIMARY

Coaxes 26 AWG (7/34), Tinned Copper, Stranded
 Dielectric Natural Foamed Polyolefin, 0.073" ± 0.002" Diameter
 Outer Shield Aluminum (In) / Polyester Tape, 25% Overlap
 Inner Shield 38 AWG Tinned Copper, 95% min. Coverage
 Jacket Polyvinyl Chloride, 0.0085" Wall Thickness 0.102" ± 0.005" Diameter

CONSTRUCTION

Number of Coaxes 6
 Color Code 1. Red 3. Blue 5. White
 2. Green 4. Black 6. Orange
 Shield Aluminum (In)/Polyester Tape, 25% min. Overlap
 Drain Wire 24 AWG (7/32) Tinned Copper, Under Tape
 Outer Jacket Polyvinyl Chloride, 0.032" Nominal Wall
 Final Diameter 0.376" ± 0.008"
 Color Dark Blue

Conductor Specifications	
Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.656
100	-5.362
200	-7.675

ELECTRICAL CHARACTERISTICS

Impedance 75 Ohms Nominal
 Capacitance 16.0 pF / ft. Nominal
 Time Delay 1.30 ns / ft. Nominal
 Velocity of Propagation 81%
 Center Cond. DC
 Resistance 40 Ohms / 1000 ft.

UL LISTING

Type CL2 as Specified in Article 725 of the National Electric Code.