


CVD 3300

PLENUM RGB / YUV 3 COAX CABLE

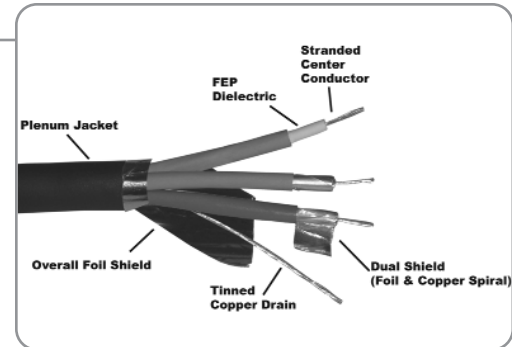

TECHNICAL SPECIFICATIONS

PRIMARY

Coaxes	26 AWG (7/34), RG174, Tinned Copper, Stranded Natural Foamed Fluorinated Ethylene Propylene,
Dielectric	0.072" +/- 0.002" Diameter
Outer Shield	Aluminum (In) / Polyester Tape, 25% Overlap
Inner Shield	38 AWG Tinned Copper, 95 % Coverage
Jacket	Polyvinyl Chloride, 0.009" Wall Thickness 0.102" +/- 0.005" Diameter

CONSTRUCTION

Number of Coaxes	3
Color Code	1. Red 2. Green 3. Blue
Shield	Aluminum (Out) / Polyester, 25% Overlap
Drain Wire	22 AWG (7/30) Tinned Copper, Over Tape
Outer Jacket	Polyvinyl Chloride, 0.0195" Wall Thickness
Final Diameter	0.263" +/- 0.008"
Color	Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.60
100	-5.10
200	-7.40

ELECTRICAL CHARACTERISTICS

Impedance	75 Ohms
Capacitance	16 pF / ft.
Time Delay	1.20 ns / ft.
Velocity of Propagation	83%
Center Cond. DC	
Resistance	40 Ohms / 1000 ft.

UL LISTING

Type CL2P as specified in Article 725 of the National Electric Code