


2COV 1100 CQ

**(2) RGG QUAD SHIELDED CABLES
(SIAMESE STYLE)**

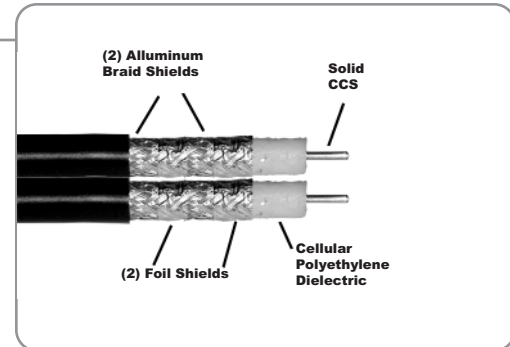

TECHNICAL SPECIFICATIONS

ELEMENT 1 & 2

Conductor	18 AWG RG-6 Solid CCS 0.040" Nominal Diameter
Dielectric	Cellular Polyethylene, 0.180" Nominal Diameter
1st Shield	Aluminum (Out) / Polyester Tape, 25% Min. Overlap
2nd Shield	Aluminum Braid, 60% Min. Coverage
3rd Shield	Aluminum (Out) / Polyester Tape, 25% Min. Overlap
4th Shield	Aluminum Braid, 40% Min. Coverage

CONSTRUCTION

Number of Conductors	Elements 1 & 2 (Siamese Style)
Outer Jacket	Polyvinyl Chloride
Color	Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.46
100	-2.05
200	-2.83

ELECTRICAL CHARACTERISTICS

Impedance	75 Ohms Nominal
Capacitance	16 pF / ft. Nominal
Velocity of Propagation	82% Nominal

UL LISTING

Type CM as Specified in Article 800 of the National Electric Code.