


CHD 3200 25

PLENUM S-VIDEO CABLE

25 AWG SOLID COPPER CONDUCTORS

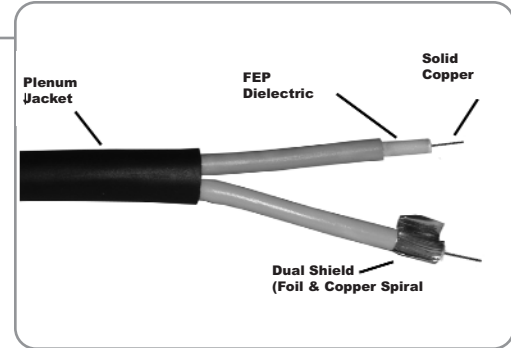

TECHNICAL SPECIFICATIONS

PRIMARY

Coaxes 25 AWG, Solid Bare Copper
 Dielectric Natural Foamed Fluorinated Ethylene Propylene, 0.074" +/- .002 Diameter
 Outer Shield Aluminum (In) / Polyester Tape, 25% Overlap
 Inner Shield 38 AWG Tinned Copper, 95% Coverage
 Jacket Polyvinyl Chloride, 0.010" Wall Thickness 0.106" +/- 0.003" Diameter

CONSTRUCTION

Number of Coaxes 2
 Color Code 1. White 2. Yellow
 Outer Jacket Polyvinyl Chloride, 0.019" Wall Thickness
 Final Diameter 0.144 x .250 +/- 0.10"
 Color Dark Blue

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.40
100	-4.80
200	-6.90

ELECTRICAL CHARACTERISTICS

Impedance 75 +/- 40hms Nominal
 Capacitance 16.8 pF / ft. Nominal
 Time Delay 1.20 ns / ft. Nominal
 Velocity of Propagation 83%

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.