


COD 1100 60F

RG11 CABLE

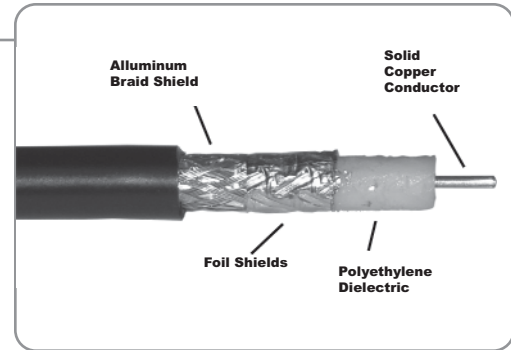

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor 14 AWG RG-11 Solid Bare Copper,
Dielectric Foam Polyethylene
Outer Shield Aluminum Braid, 60% Min. Coverage
Inner Shield Aluminum (Out) / Polyester Tape, 25% Min. Overlap

CONSTRUCTION

Number of Conductors 1
Outer Jacket Polyvinyl Chloride
Final Diameter 0.350"
Color Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.00
100	-1.50
200	-2.20

ELECTRICAL CHARACTERISTICS

Impedance 75 Ohms Nominal
Capacitance 16 pF / ft. Nominal
Velocity of Propagation 82% Nominal

UL LISTING

Type CL2 as Specified in Article 725 of the National Electric Code.