


# COD 3100 60F

## PLENUM RG11 CABLE

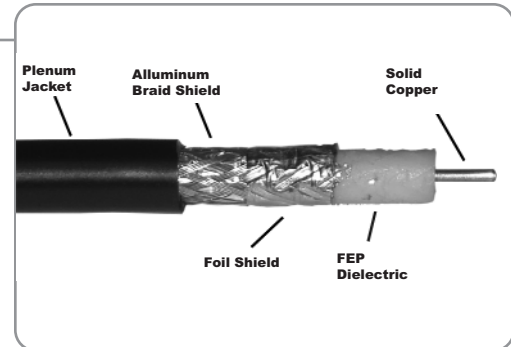

### TECHNICAL SPECIFICATIONS

#### PRIMARY

Conductor . . . . . 14 AWG RG-11 Solid Copper  
Dielectric . . . . . Foam Polyethylene  
Outer Shield . . . . . Aluminum Braid, 60% Min. Coverage  
Inner Shield . . . . . Aluminum (Out) / Polyester Tape, 25% Min. Overlap

#### CONSTRUCTION

Number of Conductors. . . . . 1  
Outer Jacket. . . . . Fluoropolymer  
Final Diameter. . . . . 0.352"  
Color. . . . . Black

Conductor Specifications	
Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.07
100	-1.50
200	-2.20

#### ELECTRICAL CHARACTERISTICS

Impedance . . . . . 75 Ohms Nominal  
Capacitance . . . . . 16.3 pF / ft. Nominal  
Velocity of Propagation . . . . . 84% Nominal

#### UL LISTING

Type CL2P as Specified in Article 725 of the National Electric Code.