


COR 1100 95

RG58/U COAX CABLE

(95% TINNED COPPER BRAID)

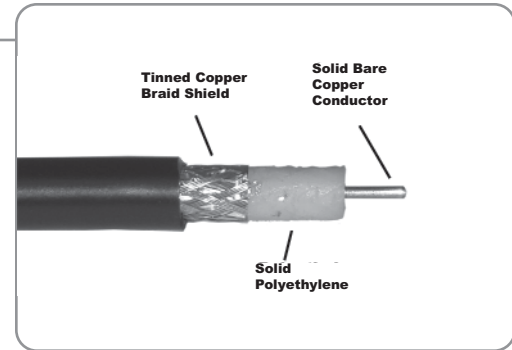

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor 20 AWG RG-59 Solid Bare Copper
Dielectric Solid Polyethylene
Shield Tinned Copper Braid, 95% min. Coverage

CONSTRUCTION

Number of Coaxes 1
Outer Jacket Polyvinyl Chloride
Final Diameter 0.195"

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-2.90
100	-4.20
200	-6.00

ELECTRICAL CHARACTERISTICS

Impedance 50 Ohms Nominal
Capacitance 30 pF / ft. Nominal
Velocity of Propagation 60% Nominal

UL LISTING

Type CL2 as Specified in Article 725 of the National Electric Code.