


# COR 3100 95

## PLENUM RG58/U COAX CABLE

(95% TINNED COPPER BRAID)

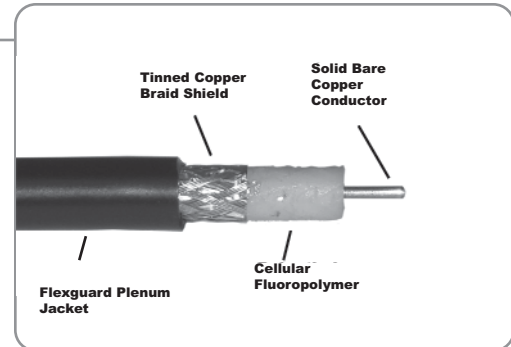

### TECHNICAL SPECIFICATIONS

#### PRIMARY

Conductor . . . . .	20 AWG RG-59 Solid Bare Copper
Dielectric . . . . .	Cellular Fluoropolymer
Shield . . . . .	Tinned Copper Braid, 95% min. Coverage

#### CONSTRUCTION

Number of Coaxes . . . . .	1
Outer Jacket . . . . .	Flexguard
Final Diameter . . . . .	0.161"

#### Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-2.80
100	-3.90
200	-6.00

#### ELECTRICAL CHARACTERISTICS

Impedance . . . . .	50 Ohms Nominal
Capacitance . . . . .	25 pF / ft. Nominal
Velocity of Propagation . . . . .	82% Nominal

#### UL LISTING

Type CL2P as Specified in Article 800 of the National Electric Code.