


COV 1100 60F

RG6 CABLE

(100% FOIL & 60% BRAIDED SHIELD)

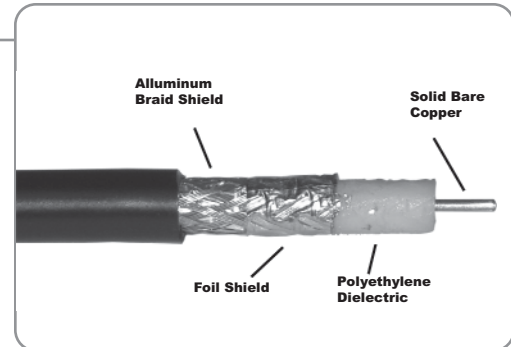

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor	18 AWG RG-6 Solid Bare Copper 0.040" Nominal Diameter
Dielectric	Cellular Polyethylene, 0.177" Nominal Diameter
Outer Shield	Aluminum Braid, 60% Min. Coverage
Inner Shield	Aluminum (Out) / Polyester Tape, 25% Min. Overlap

CONSTRUCTION

Number of Conductors	1
Outer Jacket	Polyvinyl Chloride, 0.032" Nominal Wall Thickness
Final Diameter	0.270"
Color	Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.44
100	-2.02
200	-2.80

ELECTRICAL CHARACTERISTICS

Impedance	75 Ohms Nominal
Capacitance	16 pF / ft. Nominal
Velocity of Propagation	82% Nominal

UL LISTING

Type CL2 as Specified in Article 750 of the National Electric Code.