


# COV 1100 95B

**RG6 CABLE**  
**(95% BRAIDED SHIELD)**

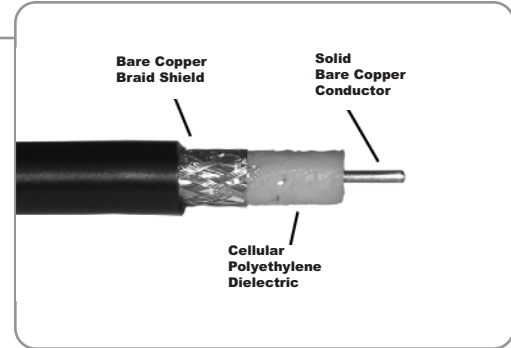

## TECHNICAL SPECIFICATIONS

### PRIMARY

Conductor . . . . . 18 AWG RG-6 Solid Bare Copper  
Dielectric . . . . . Cellular Polyethylene  
Shield . . . . . 36 AWG Copper Braid, 95% min. Coverage

### CONSTRUCTION

Number of Coaxes . . . . . 1  
Outer Jacket. . . . . Polyvinyl Chloride  
Final Diameter. . . . . 0.275"  
Color. . . . . Black

### Conductor Specifications

| Nominal attenuation |                                  |
|---------------------|----------------------------------|
| Frequency (MHz)     | Attenuation dB/100 ft. (30.48 m) |
| 100                 | -2.10                            |
| 200                 | -3.90                            |
| 400                 | -4.50                            |

### ELECTRICAL CHARACTERISTICS

Impedance . . . . . 75 Ohms Nominal  
Capacitance . . . . . 16 pF / ft. Nominal  
Velocity of Propagation . . . . . 84% Nominal

### UL LISTING

Type CL2 as Specified in Article 750 of the National Electric Code.