


COV 3100 60F

PLENUM RG6 CABLE

(100% FOIL & 60% BRAIDED SHIELD)

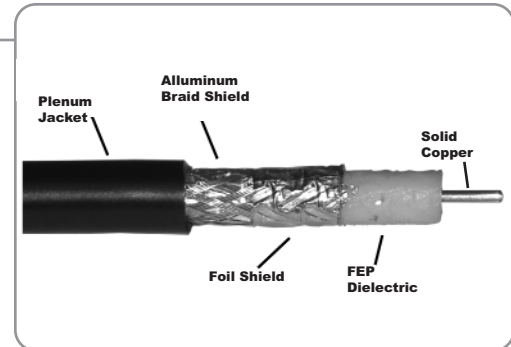

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor 18 AWG RG-6 Solid Copper
Dielectric Foamed Fluorinated Ethylene Propylene, 0.175" Diameter
Outer Shield 34 AWG Alluminum Braid, 60% Min. Coverage,
Inner Shield Aluminum (Out) / Polyester Tape, 25% Min. Overlap

CONSTRUCTION

Number of Conductors 1
Outer Jacket Fluoropolymer
Final Diameter 0.250"
Color Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
100	-2.20
200	-3.23
400	-4.78

ELECTRICAL CHARACTERISTICS

Impedance 75 Ohms Nominal
Capacitance 16 pF / ft. Nominal
Velocity of Propagation 84% Nominal

UL LISTING

Type CL2P as Specified in Article 725 of the National Electric Code.