


# COV 3100 95B

## PLENUM RG6 CABLE

(95% BRAID COVERAGE)

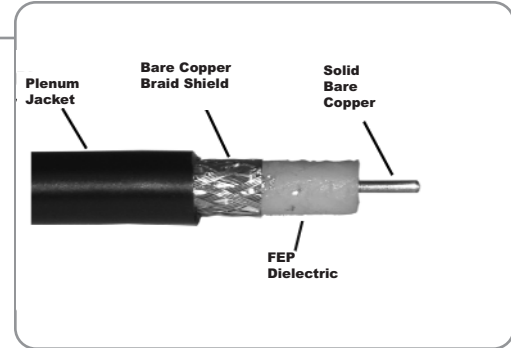

### TECHNICAL SPECIFICATIONS

#### PRIMARY

Conductor . . . . . 18 AWG RG-6 Solid Bare Copper  
Dielectric . . . . . Foamed Fluorinated Ethylene Propylene, 0.180" Diameter  
Outer Shield . . . . . 34 AWG Bare Copper Braid, 95% Min. Coverage,

#### CONSTRUCTION

Number of Conductors . . . . . 1  
Outer Jacket . . . . . Fluoropolymer  
Final Diameter . . . . . 0.240"  
Color . . . . . Black

#### Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.50
100	-2.10
300	-3.90

#### ELECTRICAL CHARACTERISTICS

Impedance . . . . . 75 Ohms Nominal  
Capacitance . . . . . 16 pF / ft. Nominal  
Velocity of Propagation . . . . . 84% Nominal

#### UL LISTING

Type CL2P as Specified in Article 725 of the National Electric Code.