


COV 3100 95F

PLENUM RG6 CABLE

(100% FOIL & 95% BRAIDED SHIELD)

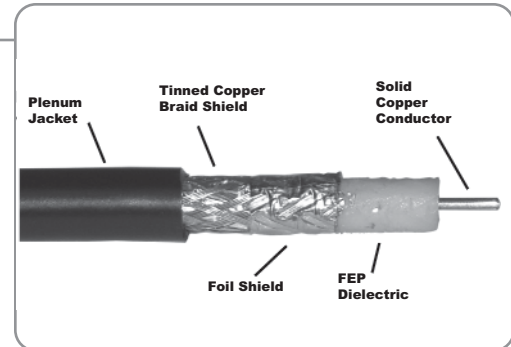

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor 18 AWG RG-6 Solid Bare Copper
Dielectric Foamed Fluorinated Ethylene Propylene, 0.170" Diameter
Outer Shield 34 AWG Tinned Copper Braid, 95% Min. Coverage,
Inner Shield Aluminum (Out) / Polyester Tape, 25% Min.Overlap

CONSTRUCTION

Number of Conductors. 1
Outer Jacket. Polyvinyl Chloride
Final Diameter. 0.225"
Color. Dark Blue

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.40
100	-2.10
200	-2.90

ELECTRICAL CHARACTERISTICS

Impedance 75 Ohms Nominal
Capacitance 17 pF / ft. Nominal
Velocity of Propagation 84% Nominal

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.