


CVD 1100 95

RG59 CABLE

(95% BRAIDED SHIELD)

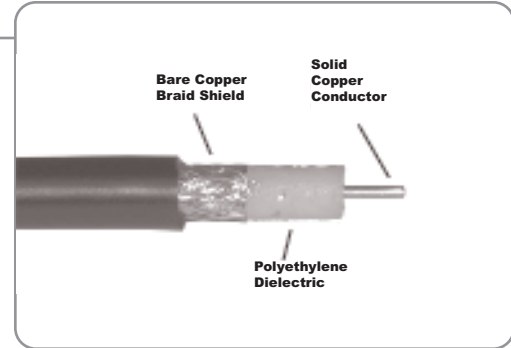

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor	20 AWG RG-59 Solid Bare Copper
Dielectric	Foam Polyethylene, 0.142" Diameter
Shield	36 AWG Bare Copper Braid, 95% min. Coverage

CONSTRUCTION

Number of Coaxes	1
Outer Jacket	Polyvinyl Chloride
Final Diameter	0.242"
Color	Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.80
100	-2.70
200	-3.80

ELECTRICAL CHARACTERISTICS

Impedance	75 Ohms Nominal
Capacitance	17 pF / ft. Nominal
Velocity of Propagation	78% Nominal

UL LISTING

Type CL2 as Specified in Article 725 of the National Electric Code.