


# CVD 1100 95F

## RG59 CABLE

**(100% FOIL & 95% BRAIDED SHIELD)**

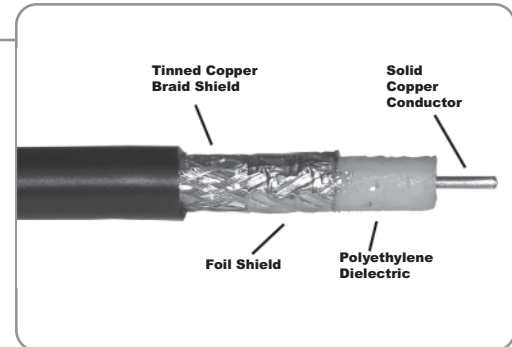

### TECHNICAL SPECIFICATIONS

#### PRIMARY

Conductor . . . . . 20 AWG RG-59 Solid Bare Copper  
Dielectric . . . . . Foam Polyethylene, 0.145" Diameter  
Outer Shield . . . . . 36 AWG Tinned Copper Braid, 95% min. Coverage  
Inner Shield . . . . . Aluminum (Out) / Polyester Tape, 25% min. Overlap

#### CONSTRUCTION

Number of Coaxes . . . . . 1  
Outer Jacket. . . . . Polyvinyl Chloride  
Final Diameter. . . . . 0.242"  
Color. . . . . Black

#### Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.80
100	-2.70
200	-3.80

#### ELECTRICAL CHARACTERISTICS

Impedance . . . . . 75 Ohms Nominal  
Capacitance . . . . . 16 pF / ft. Nominal  
Velocity of Propagation . . . . . 83% Nominal

#### UL LISTING

Type CM as Specified in Article 800 of the National Electric Code.