


CVD 1240

S-VIDEO CABLE

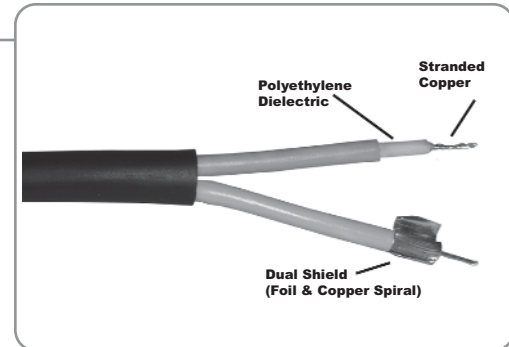

TECHNICAL SPECIFICATIONS

PRIMARY

Coaxes	26 AWG (7/34), Tinned Copper, Stranded
Dielectric	Foamed Polyethylene, 0.073" ± 0.002" Diameter
Outer Shield	Aluminum (In) / Polyester Tape, 25% Overlap
Inner Shield	36 AWG Tinned Copper, 95% min. Coverage
Jacket	Polyvinyl Chloride, 0.010" Wall Thickness, 0.104" ± 0.005" Final Diameter

CONSTRUCTION

Number of Coaxes . .	2
Color Code	1. White 2. Yellow
Outer Jacket	Polyvinyl Chloride, 0.024" Nominal Wall
Final Diameter	0.245" ± 0.005"
Color	Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.656
100	-5.362
200	-7.675

ELECTRICAL CHARACTERISTICS

Impedance	75 Ohms Nominal
Capacitance	18.0 pF / ft. Nominal
Time Delay	1.30 ns / ft. Nominal
Velocity of Propagation	81%

UL LISTING

Type CL2 as Specified in Article 725 of the National Electric Code.