


CVD 3100 95B

PLENUM RG59 CABLE

(95% BRAIDED SHIELD)

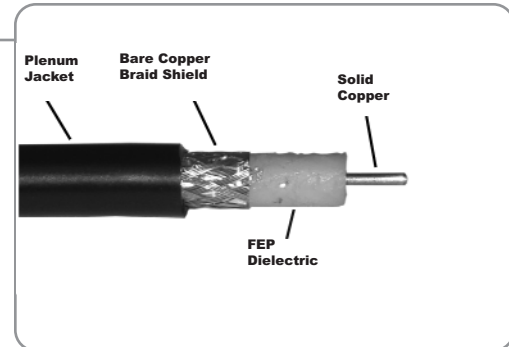

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor 20 AWG RG-59 Solid Copper
Dielectric Foamed Fluorinated Ethylene Propylene, 0.140" Diameter
Outer Shield 36 AWG Bare Copper, 95% min. Coverage

CONSTRUCTION

Number of Conductors 1
Outer Jacket Fluoropolymer
Final Diameter 0.200"
Color Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.656
100	-5.362
200	-7.675

ELECTRICAL CHARACTERISTICS

Impedance 75 Ohms Nominal
Capacitance 16pF / ft. Nominal
Velocity of Propagation 82%

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.