


CVD 3100 95F

PLENUM RG59 CABLE

(100% FOIL & 95% BRAIDED SHIELD)

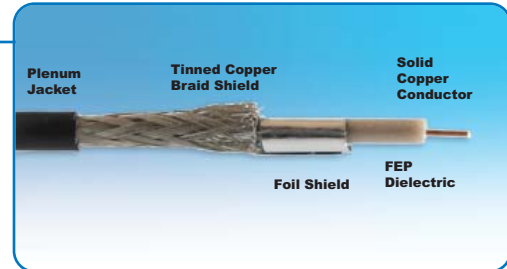

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor	20 AWG RG-59 Solid Bare Copper
Dielectric	Foamed Fluorinated Ethylene Propylene, 0.140" Diameter
Outer Shield	36 AWG Tinned Copper, 95% min. Coverage
Inner Shield	Aluminum (Out) / Polyester Tape, 25% min. Overlap

CONSTRUCTION

Number of Conductors	1
Outer Jacket	Polyvinyl Chloride
Final Diameter	0.200"
Color	Dark Blue

Conductor Specifications

Frequency (MHz)	Nominal attenuation	
	dB/100 ft. (30.48 m)	Attenuation
100		-2.80
200		-4.10
400		-6.30

ELECTRICAL CHARACTERISTICS

Impedance	75 Ohms Nominal
Capacitance	16 pF / ft. Nominal
Velocity of Propagation	82% Nominal

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.



Scan QR code with your smart phone to view online specs