


CVD 3100 95F

PLENUM RG59 CABLE

(100% FOIL & 95% BRAIDED SHIELD)

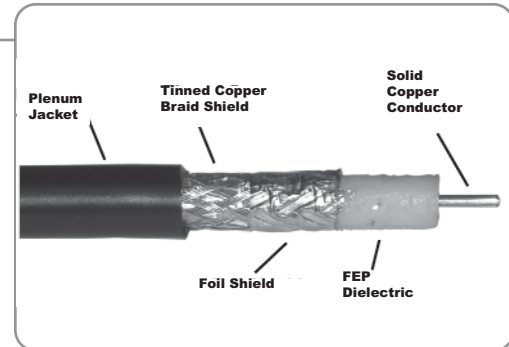

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor 20 AWG RG-59 Solid Bare Copper
Dielectric Foamed Fluorinated Ethylene Propylene, 0.140" Diameter
Outer Shield 36 AWG Tinned Copper, 95% min. Coverage
Inner Shield Aluminum (Out) / Polyester Tape, 25% min. Overlap

CONSTRUCTION

Number of Conductors 1
Outer Jacket Polyvinyl Chloride
Final Diameter 0.200"
Color Dark Blue

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.30
100	-2.70
200	-3.90

ELECTRICAL CHARACTERISTICS

Impedance 75 Ohms Nominal
Capacitance 16 pF / ft. Nominal
Velocity of Propagation 82% Nominal

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.