


CVD 4200

PLENUM S-VIDEO CABLE

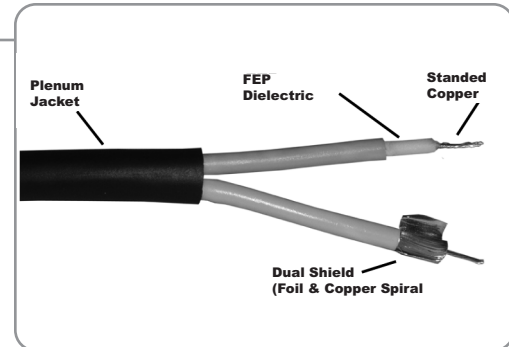

TECHNICAL SPECIFICATIONS

PRIMARY

Coaxes	26 AWG (7/34), Tinned Copper, Stranded
Dielectric	Natural Foamed Fluorinated Ethylene Propylene, 0.072" Diameter
Outer Shield	Aluminum (In) / Polyester Tape, 25% Overlap
Inner Shield	38 AWG Tinned Copper, 97% Coverage
Jacket	Polyvinyl Chloride, 0.009" Wall Thickness 0.102" +/- 0.003" Diameter

CONSTRUCTION

Number of Coaxes	2
Color Code	1. White 2. Yellow
Outer Jacket	Polyvinyl Chloride, 0.014" Wall Thickness
Final Diameter	0.236"
Color	Dark Blue

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.60
100	-5.10
200	-7.40

ELECTRICAL CHARACTERISTICS

Impedance	75 Ohms Nominal
Capacitance	16 pF / ft. Nominal
Time Delay	1.20 ns / ft. Nominal
Velocity of Propagation	83%

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.