


P R6+2-18

PLENUM RG6 CABLE WITH (2) 18 AWG CONDUCTORS

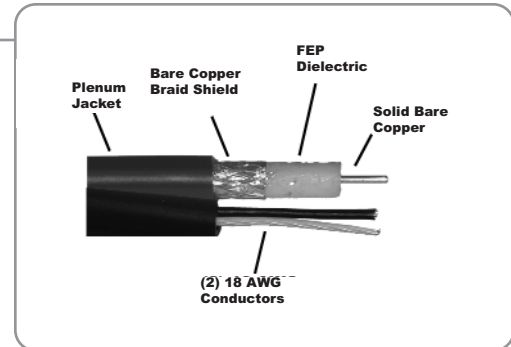

TECHNICAL SPECIFICATIONS

ELEMENT 1

Conductor 18 AWG RG-6 Solid Bare Copper
Dielectric Foamed Fluorinated Ethylene Propylene
Shield 36 AWG Bare Copper Braid, 95% min. Coverage

ELEMENT 2

Conductors (2) 18 AWG (16/30) Stranded Copper
Insulation Foamed Fluorinated Ethylene Propylene

CONSTRUCTION

Number of Coaxes Elements 1 & 2 (Siamese Style)
Outer Jacket Remguard
Color White

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.50
100	-2.10
300	-3.90

ELECTRICAL CHARACTERISTICS

Impedance 75 Ohms Nominal
Capacitance 16 pF / ft. Nominal
Velocity of Propagation 84% Nominal

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.