


R6+2-18

RG6 CABLE WITH (2) 18AWG CONDUCTORS (SIAMESE STYLE)

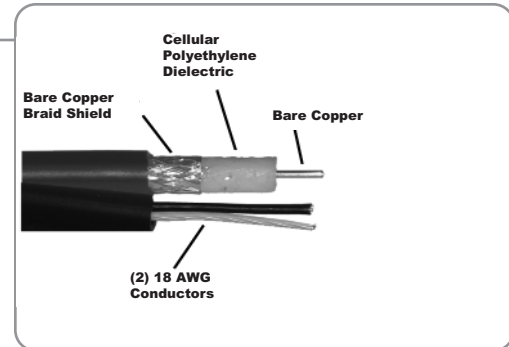

TECHNICAL SPECIFICATIONS

PRIMARY

Conductor 18 AWG RG-6 Solid Copper
Dielectric Cellular Polyethylene
Shield 36 AWG Bare Copper Braid, 95% min. Coverage

ELEMENT 2

Conductors (2) 18 AWG (16/30) Stranded Copper
Insulation Polyvinyl Chloride

CONSTRUCTION

Number of Coaxes Elements 1 & 2 (Siamese Style)
Outer Jacket. Polyvinyl Chloride
Color. Black

Conductor Specifications

Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-1.46
100	-2.05
200	-2.83

ELECTRICAL CHARACTERISTICS

Impedance 75 Ohms Nominal
Capacitance 16 pF / ft. Nominal
Velocity of Propagation 82% Nominal

UL LISTING

Type CL2 as Specified in Article 725 of the National Electric Code.