



Part Number:	ADC-HDEQ-TX
Revision Number:	1
Date:	12-10-2019
Page Number:	1 of 4



The Covid HDMI type-A adaptors with EQ are a convenient solution for connecting the P-HDADC with copper cables on the front end, such as on a wall plate to the source. Covid's HDMI Mini-MD Active Optical Cable series can transmit HDMI 2.0 signals up to 100 meters and the detachable design allows for installation in narrow environments. In addition, the HDMI connector is tailored with T-Grip connectors to provide higher mechanical retention strength when inserted.





#### **Features**

- Built in EQ for use with 6ft HDMI 2.0 front-end copper cables
- Supports HDMI 2.0 4K2K 60Hz 4:4:4
- Compliant with HDMI 2.0/1.4b/1.4a version
- Supports HDCP/EDID/ CEC / DDC /HPD
- Detachable and variable design, easy to install
- · Cable length up to 100M, UL/CSA/ETL certified Plenum rating
- T-Grip HDMI connector design, insertion force: 10Kgf max, withdraw force: 4Kgf min
- Add power easily with source/display side micro USB receptacles
- RoHS compliant
- Source and display ends of cable identifiable by color

Part Number:	ADC-HDEQ-TX
Revision Number:	1
Date:	12-10-2019
Page Number:	2 of 4



### **Applications**



### Spe


Signal Input & Output		
Support HDMI ver.	HDMI 2.0/1.4b/1.4a/1.4 version	
Video format	4K2K HDR/1080p/ 1080i/ 720p (Support 4K2K 60Hz 4:4:4)	
Support features	HDCP/EDID/ CEC / DDC /HPD	
Signal input & output connector	HDMI type-A (Plug) to type-D (receptacle)	
General		
External supplied voltage	5V DC	
External supplied current (Average)	110mA	
Operating temperature	0°C to 50°C	
Storage temperature	-10°C to 70°C	
Humidity	0% <sup>∼</sup> 85% RH	
Color	Black	

Part Number:	ADC-HDEQ-TX
Revision Number:	1
Date:	12-10-2019
Page Number:	3 of 4



### **Product Dimensions**

Unit of Measure (mm)

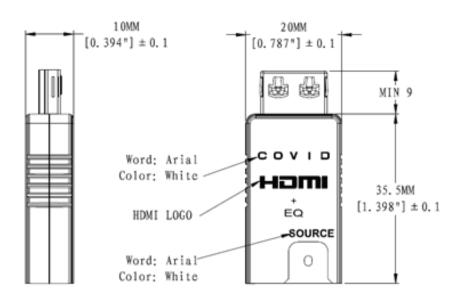

Part Number:	ADC-HDEQ-TX
Revision Number:	1
Date:	12-10-2019
Page Number:	4 of 4