

# 50/125 SSF™ Multimode OM3, 3.0 mm Jacketed Duplex Riser / Plenum I/O / LSZH Cable


Type: OM3, OFNR, CSA FT4 / OFNP, CSA FT6 / CPR LSZH



Cleerline SSF™ Duplex cable is composed of two strands of SSF™ cable in zipcord style with an overall 3.0 mm Riser, Plenum, or CPR-rated LSZH jacket.

SSF™ Duplex is ideal for inter-building or intra-building data communication backbones. The cable's zipcord construction allows easy separation of the fiber strands if desired.

Cleerline SSF™ Duplex Multimode is fully compatible with all common connector systems for standard 50/125 multimode fibers. The included SSF™ fibers provide extreme durability and strength, with up to 10,000 times the bend insensitivity of traditional fiber.

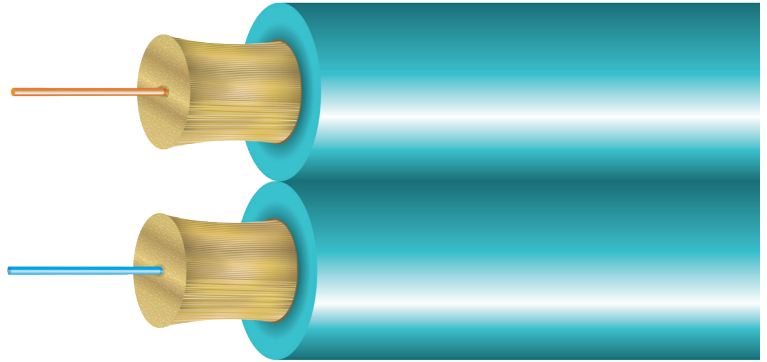


3D VIEW

## FEATURES AND BENEFITS

- Zipcord construction - easy to separate strands
- High mechanical strength, superior fatigue (nD = 30)  
Compatible with common connector systems for 50/125 multimode fibers
- Up to 10,000x the bend longevity of traditional fiber
- Integral SSF™ coating provides glass protection
- Increased safety due to incredible bend insensitivity
- Exclusive 250 µm Soft Peel acrylate

## APPLICATIONS

- Inter-/Intra-building voice or data communication
- Installation in ducts or underground conduit
- Fiber-to-the-desk (FTTD) / Fiber-to-the-Home (FTTH)
- ETL listed type OFNP for installation in ducts, plenums and other spaces used as environmental air returns when installed in accordance with NEC article 770-51 (a) and 770-53(a)

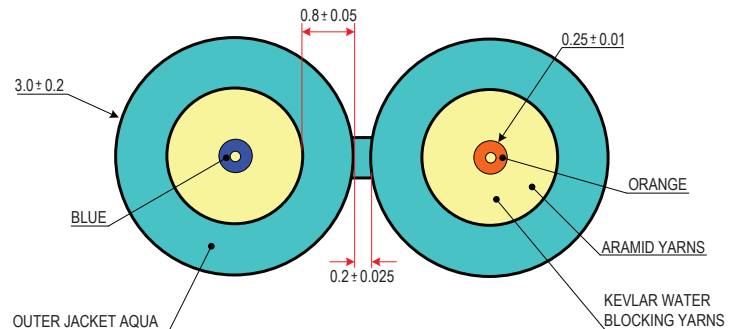

TYPICAL CROSS SECTION

PART NUMBER	FIBERS	DESCRIPTION	TYPE RISER/PLENUM/LSZH	O.D.	WEIGHT (LB / 1000 FT)
D50125MOM3X	2 Fibers	Duplex 50/125 SSF - 1000 ft Spool	X= R/P/L	3.0 mm x 2	13.2
D50125MOM3X-500	2 Fiber	Duplex 50/125 SSF - 500 ft Spool	X = R/P	3.0 mm x 2	7
D50125MOM3X-B	2 Fibers	Duplex 50/125 SSF - Cut to Order	X= R/P/L	3.0 mm x 2	13.2
D50125MOM3P-BK	2 Fibers	Duplex 50/125 SSF, Black Jacket - 1000 ft Spool	Plenum, black color	3.0 mm x 2	13.2
D50125MOM3P-BK-B	2 Fibers	Duplex 50/125 SSF, Black Jacket - Cut to Order	Plenum, black color	3.0 mm x 2	13.2

Have questions? We're here to help.

800.638.6104 | [www.covid.com](http://www.covid.com)



## CONSTRUCTION

FIBER	
Fibers	2
Type	50/125 Multimode OM3
Coating	250 $\mu$ m "Soft Peel" S-Type Coating (1 = Blue, 2 = Orange)
Color Coding	Per TIA/EIA 598C

JACKET	
Type	Riser Rated PVC (Indoor) / Plenum Rated PVC + UV I/O / CPR LSZH (Indoor/Outdoor)
Color	Aqua / Black (plenum only)
Outer Diameter	3.0 mm x 2
Markings	Sequential Foot Markings
Strength Member	Kevlar (Plenum + water blocking yarns)

PHYSICAL DATA	
Storage Temperature Range	-40°C to +85°C
Operating Temperature Range	-20°C to +75°C
Max Tensile Load (Installation)	1000 N (225 lbf)
Max Tensile Load Long Term	500 N (112 lbf)
Min. Bend Radius, Unloaded	1 x O.D.
Cable Outside Diameter, Nominal	3.0 mm x 2
Cable Package	1000 ft, 500ft Reel or customer request, spooled
Rating	FT4 - Riser / FT6-Plenum / CPR LSZH
Crush Resistance (TIA/EIA 455-41A)	100 kgf / mm
Impact Resistance (TIA/EIA 455-25B)	1500 impact cycles
Flexing @ 90 degrees (TIA/EIA 455-104A)	2000 flexing cycles

ENVIRONMENTAL CHARACTERISTICS	
Temperature Dependence, 850 nm and 1300 nm	$\leq 0.5$ dB / km
Induced Attenuation	-60°C to + 85°C
Watersoak Dependence, 850 nm and 1300 nm	$\leq 0.5$ dB / km
Induced Attenuation at 23°C for 30 days	
Damp Heat Dependence, 850 nm and 1300 nm	$\leq 0.5$ dB / km
Induced Attenuation at 85°C, 85% R.H., 30 days	
Dry Heat Dependence, 850 nm and 1300 nm	$\leq 0.5$ dB / km
Induced Attenuation at 85°C, 30 days	

PHYSICAL CHARACTERISTICS		
Core Diameter	50.0 $\pm$ 2.5 $\mu$ m	
Core Non-circularity	$\leq 6\%$	
Core / Hybrid Cladding Concentricity Error	$\leq 3.0$ $\mu$ m	
Hybrid Cladding Diameter	125 $\pm$ 0.7 $\mu$ m	
Hybrid Cladding Non-Circularity Error	$\leq 3.0\%$	
Soft Peel Jacket Identifier	250 $\pm$ 0.7 $\mu$ m	
Coating Strip Force	100 g	
Fiber Curl	$\geq 2$ m	
Proof Test	100 kpsi	
Dynamic Fatigue 23°C, 41% R.H.	$> 30$ nD	
Bend Induced Attenuation, 1300 nm	100 turns around 75 mm diameter mandrel	$\leq 1.0$ dB
Length	1.0 - 8.8 Km	

OPTICAL CHARACTERISTICS		
Attenuation Coefficient	850 nm	$\leq 3.0$ dB/km
	1300 nm	$\leq 1.0$ dB/km
Numerical Aperture	0.200 $\pm$ 0.015	
Overfilled Modal Bandwidth	850 nm	$\geq 1500$ MHz · km
	1300 nm	$\geq 500$ MHz · km
High Performance EMB	850 nm	$\geq 2000$ MHz · km

BACKSCATTER CHARACTERISTICS		
Attenuation Directional Uniformity	$\leq 0.05$ dB/km	
Attenuation Uniformity	$\leq 0.05$ dB/km	
Group Index of Refraction	850 nm	1.481
	1300 nm	1.476

COMPLIANCE	
ETL Listed Type OFNR, CSA FT4, IECA S-83-596 & OFNP, CSA FT6 / IECA S-104-696. LSZH Listed CPR Cca-s1a, d1, a1. DoP Available on Request. RoHS Compliant Directive 2011/65/EU SSF™ conforms to the requirement of IEC 60793 A1a, ISO/IEC 11801 & ITU-T G.651.1 850 nm Laser-Optimized 50 $\mu$ m core multimode fiber for 10 Gb/s and above applications.	