## TECHNICAL SPECIFICATION HDA30-XX



Description: Active Optical HDMI 2.1, 48G, 8K Ultra HD, Distances up to 75ft, Non-Plenum

Why Use This Product: The AOC HDMI cable is the perfect choice for high resolution digital video applications up to 75ft.

#### **Key Features**

- Non-Plenum
- HDMI 2.1 Cable | 48Gbps
- Supports HDR10 and resolutions up to 4320p@60Hz (8K)
- DSC 1.2 resolutions up to 8K@120Hz and 10K@120Hz
- Active Optical Cable (Fiber-Copper Hybrid)
- eARC support for Dolby Atmos, DTS-X 5.1/7.1 Lossless, Dolby TrueHD, and DTS-HD Surround Sound
- Supports CEC commands and ARC features
- Supports Deep Color and x.v.Color
- EDID, CEC, HDCP compliant
- Covid T-Grip<sup>™</sup> Connectors (16lbs of retention force)



to IIII	in the second
60	000

HDMI 2.1 AOC CABLE, 48G Non-Plenum

Part Number:	HDA30-XX
Revision Number:	3
Date:	1-10-2024
Page Number:	1 of 2


1723 W. 4th Street Tempe Arizona 85281 **P**: 800.638.6104 | **F**: 480.966.6728 | **E**: sales@covid.com | www.covid.com

# TECHNICAL SPECIFICATION HDA30-XX



### **Technical Specifications**

Maximum Video Settings	4K@144Hz and 8K@60Hz
Maxiumum DSC Resolutions	8K@120Hz and 10K@120Hz
Connectors	HDMI 2.1 - Type A
Connector Hood	Metallic, Black/Silver
Bandwidth Cable Type Cable Jacket Outer Diameter Minimum Bend Radius.	48Gbps (4x12Gbps per channel)
Cable Type	Hybrid with OM3 fiber and copper wire
Cable Jacket	CL3, Black
Outer Diameter	0.18in
Minimum Bend Radius	1.8in
Operating Humidity Operating Humidity	40°C ~ + 70°C
Operating Humidity	10% ~ 80% RH
Number of Connector Mating Cycles	3000
Available Lengths	25ft, 35ft, 50ft, 75ft
Number of Connector Mating Cycles	4.75v ~ 5.25v
Differential Input	100 ohm (typ)
Differential Input Power Consumption	250mW (max)

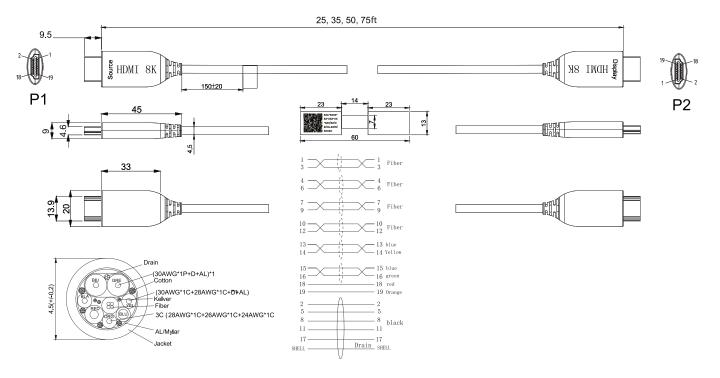

### HDMI 2.1 AOC CABLE, 48G Non-Plenum

Part Number:	HDA30-XX
Revision Number:	3
Date:	1-10-2024
Page Number:	2 of 2