

TECHNICAL SPECIFICATION



P-HD24-XXRM

Description: Active HDMI Cable with Ethernet, 24 AWG Construction, Distances up to 100 Feet, Plenum


Why This Cable?

This active 24 AWG cable has built-in circuitry allowing for longer cable runs. It ships complete with Covid's Spear-head pull system and T-Grip connectors for a more secure connection.



Technical Specification

Maximum Video Settings:	50' = 2160P@30Hz (4K -10G) 75' = 1080P@60Hz (12 bit) 100' = 1080P@60Hz (8 bit)
Connectors:	HDMI, 19Pin, Male, T-Grip, Overall AU Plating
Connector Hood:	Over-Mold, Black
Cable Jacket:	PVC, Dark Blue
Cable Conductors:	24 AWG*5P (STP)+4C
Overall Shield:	Copper Foil with Adhesive Backing
Outer Diameter:	0.41"
Minimum Bend Radius:	4.1"
Maximum Tensile:	15 kgf
Operating/Storage Temperature:	-10°C ~ + 75°C
Operating Humidity:	50% ~ 75%
Number of Connector Mating Cycles:	3000
Compliances:	RoHS, Type CMP
Available Lengths:	50ft. & 75ft. & 100ft.

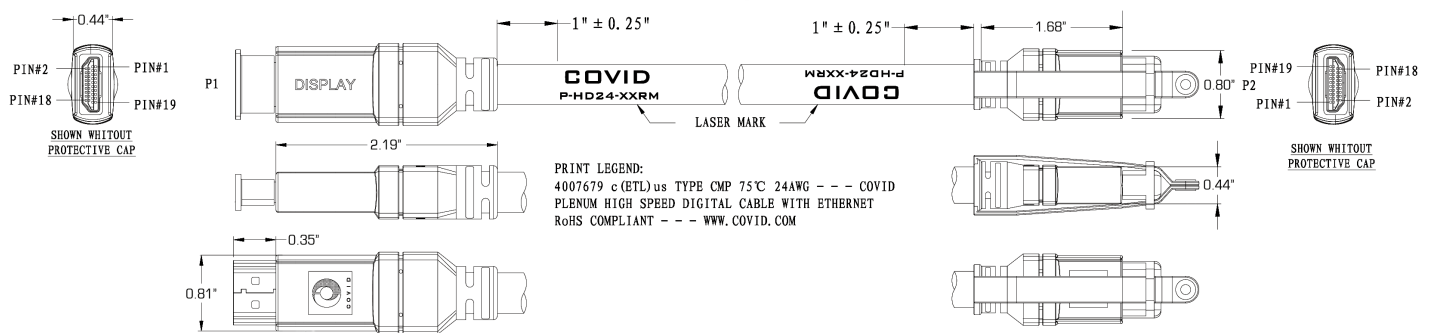

Active HDMI Cable - Ethernet - 24 AWG

Plenum

Part Number:	P-HD24-XXRM
Revision Number:	1
Date:	12-1-2017
Page Number:	1 of 1

1723 W. 4th Street Tempe Arizona 85281

P: 800.638.6104 | F: 480.966.6728 | E: sales@covid.com | www.covid.com