

TECHNICAL SPECIFICATION

TEST-HD-200



Description: Mini 4K 18G HDMI Signal Generator and Display Emulator

Why Use This Product: The TEST-HD-200 is a portable mini HDMI signal generator and display emulator that outputs up to 4K 60Hz 4:4:4, analyzes HDCP and signal status (5V, TMDS), and uses a 4-pin DIP switch with LED indicators for easy AV testing and installation.

Key Features

- HDMI resolutions up to 4K 60Hz 4:4:4
- HDMI signal generator and display emulator
- 4-pin DIP switch for setting video resolution and HDCP
- Supports HDCP OFF, HDCP 1.4 or HDCP 2.2 output
- Supports four different test patterns for HDCP version




4K UHD

Technical Specifications

Technical

Video Input.....	Up to HDMI 2.0 4K 60Hz 4:4:4
Video Output.....	Up to HDMI 2.0 4K 60Hz 4:4:4
HDMI Version.....	2.0
HDCP Content.....	2.2, 1.4
Power Supply.....	DC 5V 1A
Power.....	2W Max
Operation Temperature.....	-5 to +55°C (+23° to +131°F)
Storage Temperature.....	-25 to +70°C (-13° to +158°F)
Relative Humidity.....	10% to 90%, Non-condensing
Dimensions.....	2.95in (75mm) x 0.87in (22mm) x 0.75in (19mm)
Net Weight.....	2.29oz (65g)

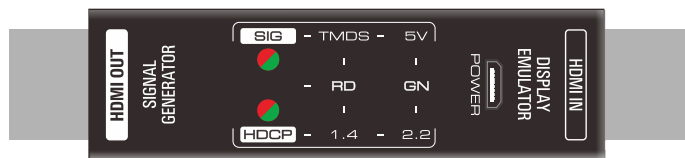

TOP PANEL



SIDE PANEL

Mini 4K HDMI Signal Generator & Display Emulator

Part Number:	TEST-HD-200
Revision Number:	2
Date:	7-1-2026
Page Number:	1 of 1

1723 W. 4th Street Tempe Arizona 85281

P: 800.638.6104 | F: 480.966.6728 | E: sales@covid.com | www.covid.com

Disclaimer: Conditions of use may vary. Information is subject to change without notice.