


CSW0200-16

16/2, Shielded

Description Communications & Control Cable - (2) 16 AWG Shielded Conductors - Non-Plenum

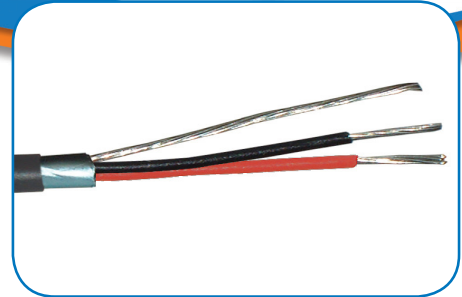

Construction

Conductor

Number: 2 Conductor
Material: 16 AWG Bare Copper
Stranding: 7 Strand

Color Code

Pair#1: Black
Pair#2: Red

Insulation

Material: Polyvinyl Chloride
Thickness: 0.008 in. Nominal

Shield

Aluminum/Polyester Tape 100% Coverage
Drain: Stranded Tin Copper

Jacket

Material: Polyvinyl Chloride
Thickness: 0.015 in. Nominal

Overall Diameter:

0.182 in. +/-

Approximate Weight

48 lbs.

Electrical Characteristics

Operative Voltage: 300 V.
DC Resistance per Conductor @ 20°C: 4.2Ω/1,000'

UL Listing

Type CM as Specified in Article 800 of the National Electric Code.