


CSW3200-16

16/2, Shielded

Description Communications & Control Cable - (2) 16 AWG Shielded Conductors - Plenum

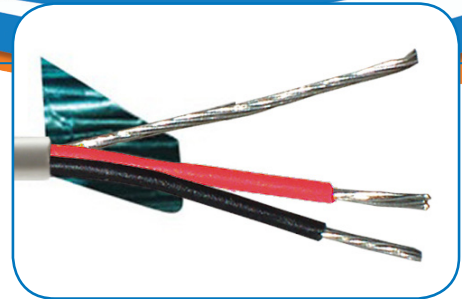

Construction

Conductor

Number: 2 Conductor
Material: 16 AWG Bare Copper
Stranding: 7 Strand

Color Code

Pair#1: Black
Pair#2: Red

Insulation

Material: Low Smoke PVC
Thickness: 0.007 in. Nominal

Shield

Overall Aluminum/Polyester Tape 100% Coverage
Drain: Stranded Tin Copper

Jacket

Material: Low Smoke PVC
Thickness: 0.015 in. Nominal

Overall Diameter:

0.180 in. +/-

Approximate Weight

30 lbs.

Electrical Characteristics

Operative Voltage: 300 V.
DC Resistance per Conductor @ 20°C: 4.2Ω/1,000'

UL Listing

Type CMP as Specified in Article 800 of the National Electric Code.