


CSW3400-22

22/4, Shielded

Description Communications & Control Cable - (4) 22 AWG Shielded Conductors - Plenum

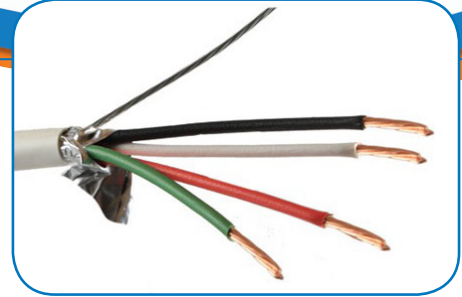

Construction

Conductor

Number: 4 Conductor
Material: 22 AWG Bare Copper
Stranding: 7 Strand

Color Code

Pair#1: Black
Pair#2: White
Pair#3: Red
Pair#4: Green

Insulation

Material: Low Smoke Flame Retardant Polyvinyl Chloride
Thickness: 0.007 in. Nominal

Shield

Overall Aluminum/Polyester Tape 100% Coverage
Drain: Stranded Tin Copper

Jacket

Material: Low Smoke Flame Retardant Polyvinyl Chloride
Thickness: 0.015 in. Nominal

Overall Diameter:

0.137 in. +/-

Approximate Weight

18 lbs.

Electrical Characteristics

Operative Voltage: 300 V.
DC Resistance per Conductor @ 20°C: 17Ω/1,000'

UL Listing

Type CMP as Specified in Article 800 of the National Electric Code.