


CSW3900-28

28/9, Shielded, Plenum

Description Communications & Control Cable - (9) 28 AWG
Shielded Conductors - Plenum

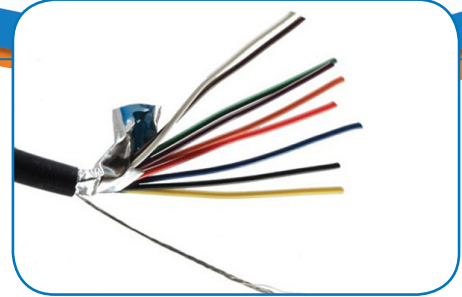

Primary

Conductor

Number: 9 Conductor
Material: 28 AWG Stranded, Tinned Copper

Jacket

Material: PVC Alloy
Color: Dark Blue

Color Code

Pair#1: Black
Pair#2: Red
Pair#3: Brown
Pair#4: Orange
Pair#5: Violet
Pair#6: White
Pair#7: Green
Pair#8: Blue
Pair#9: Yellow

Overall Diameter:

0.150 in. +/-

UL Listing

Type CMP as Specified in Article 800 of
the National Electric Code.

Insulation

Material: PVC Alloy

Shield

Aluminum/Polyester Tape 25% Overlap
Drain: 28 AWG Stranded, Tinned Copper

Approximate Weight

17 lbs. per 1000 ft.

Electrical Characteristics

Max Conductor DC Resistance 20°C (ohms/km): 218
Nom. Capacitance Conductor to Shield: 170 (pF/M)
Nom. Capacitance Conductor to Conductor: 90 (pF/M)