


# P-HD28

## HDMI Cable, 28 AWG, Plenum

**Description** HDMI Cable - 28 AWG - Plenum - For Use with Luxi HDMI Connectors

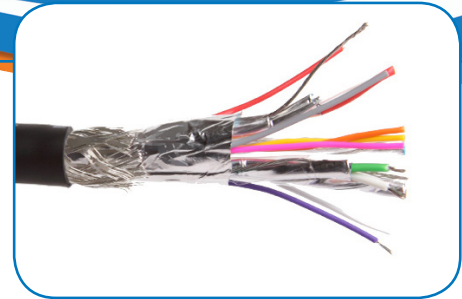

### Technical Specifications

#### Element 1

Conductor: 28 (7/36) AWG stranded tinned copper  
 Insulation: Foam-FEP, O.D: 0.98mm. Nominal  
 Pairing: (2) insulated conductors twisted together  
 Color Code: Blue/white, red/white, green/white, brown/white  
 Inner Shield: Aluminum-Foil/mylar, 25%min. overlap  
 Outer Shield: Mylar tape, 25% min. overlap  
 Drain: 28AWG tinned stranded copper

#### Element 2

Conductor: 28 (7/36) AWG Stranded tinned copper  
 Insulation: FEP, O.D. 0.62mm. Nominal  
 Pairing: (2) insulated conductors twisted together  
 Color Code: Orange and yellow

#### Element 2

Conductor: 28 (7/36) AWG Stranded tinned copper  
 Insulation: FEP, O.D. 0.62mm. Nominal  
 Color Code: Purple, gray, red, white, pink

#### Construction

Conductors: Elements 1, 2 & 3  
 Inner Shield: Aluminum Foil/mylar, 25%min. overlap  
 Outer Shield: 38 AWG tinned copper braid, 80% min coverage  
 Drain: 28 (7/36) AWG tinned stranded copper  
 Jacket: PVC alloy, O.D 7.0mm. Nominal, Covid Blue

#### Approximate Weight:

53 lbs. per 1000 ft.

### UL Listing

Type CMP as Specified in Article 800 of the National Electrical Code.