

TECHNICAL SPECIFICATION




MC-HD2BK-XXH

Description: Slim Line HDMI 2.0 Cable with Ethernet and Adapter Loop Mounting Point, 32 AWG Construction, Distances up to 10', Non-Plenum


Why This Cable?

This HDMI cable offers a SLIM HDMI connector and adapter loop mounting point. In addition this cable is rated for HDMI 2.0 applications.

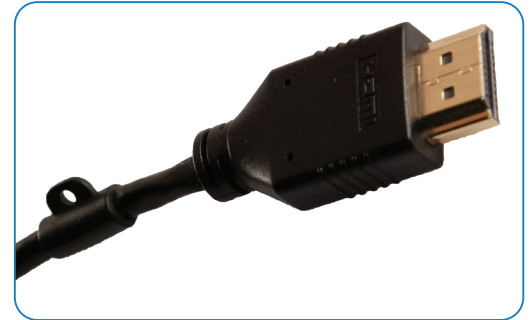

Technical Specification

Maximum Video Settings:	18", 3', 6', 10' = 2160P@60Hz (4K -18G)
Connectors:	HDMI, 19Pin, Male, Overall AU Plating
Connector Hood:	Over-Mold, Black
Cable Jacket:	PVC, Black
Cable Conductors:	32 AWG*5P (STP)+4C
Overall Shield:	Copper Foil with Adhesive Backing
Outer Diameter:	0.189"
Minimum Bend Radius:	1.89"
Maximum Tensile:	6 kgf
Operating/Storage Temperature:	-10°C ~ + 75°C
Operating Humidity:	50% ~ 75%
Number of Connector Mating Cycles:	10000
Compliances:	RoHS, Type CM
Available Lengths:	18inch, 3ft., 6ft, & 10ft.

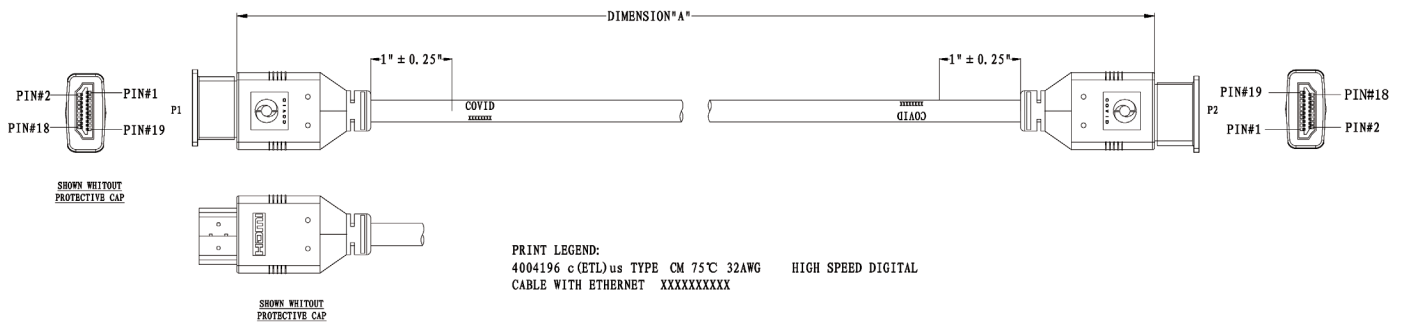

Part Number:	MC-HD2BK-XXH
Revision Number:	1
Date:	1-7-2020
Page Number:	1 of 1

HDMI 2.0 Cable - 18G - Slim Line - 32 AWG
Non-Plenum

1723 W. 4th Street Tempe Arizona 85281

P: 800.638.6104 | F: 480.966.6728 | E: sales@covid.com | www.covid.com